

LEEDS




Clean, beautiful, single or double sided surface wall-fixtures with class leading performance. Minimalist form, yet the most powerful and flexible lighting tool of its type, offering packages up to 4000 lumens and various street optic options.




Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


Feature

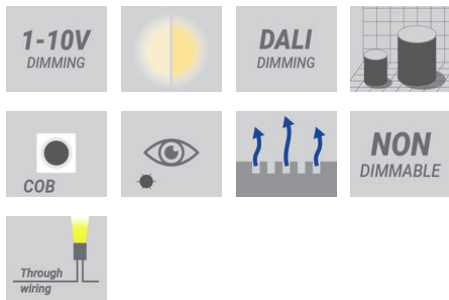


Light symbol

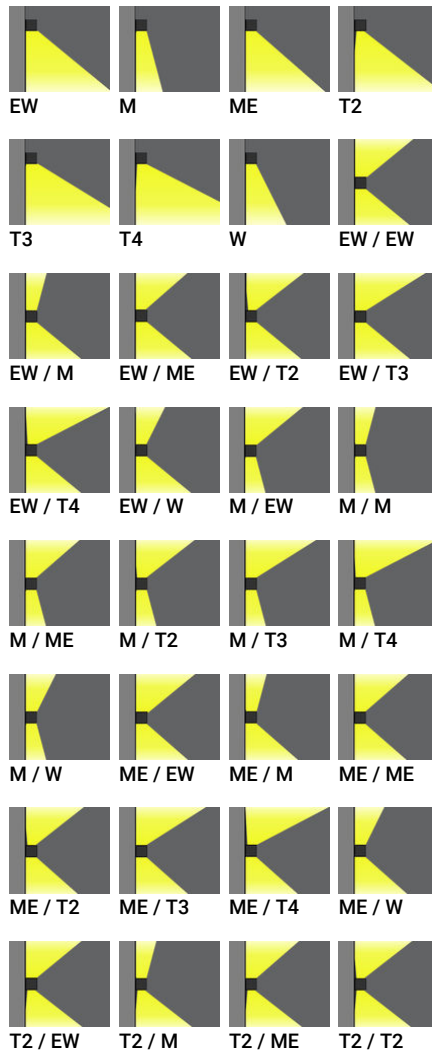

Product colour

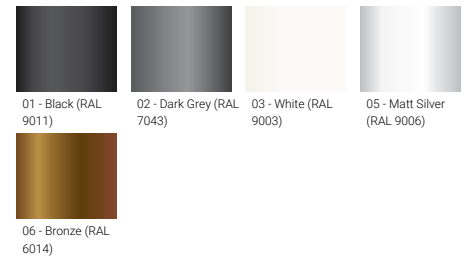

Special finishes upon request

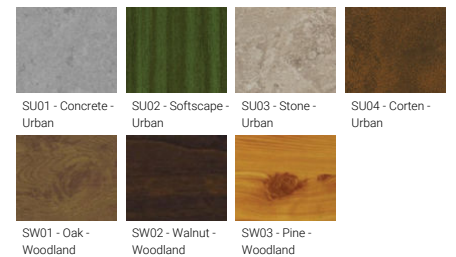

We reserve the right to make technical and design changes.


01:30, 16-05-2023

<https://www.ligman.com/leeds-surface-facade-luminaires-lee-su3/>

THAILAND





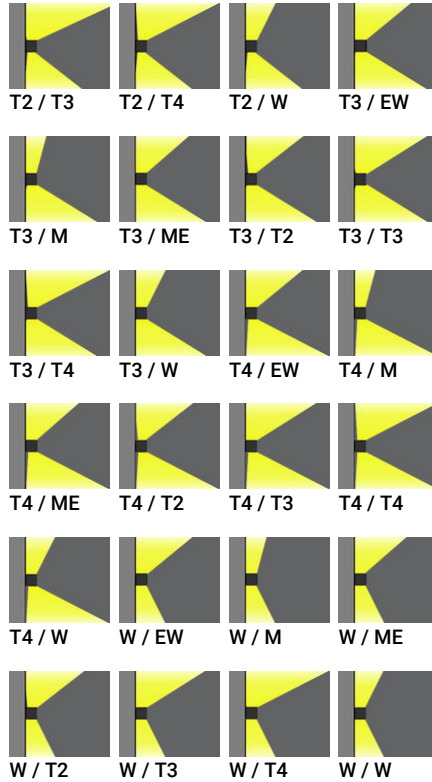

LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prio,
24150 Chachoengsao - Thailand
info@ligman.com

LEEDS










LEEDS

Technical information

| | Model number | Light source | Power | Lumen | Optic | CCT / CRI | Dimming type | Weight | |
|--|------------------|--------------|-------|----------------|--|--------------------------|---------------------|--------|---|
| Down (Optic) & Up (Optic 2nd) - Rectangular | | | | | | | | | |
| LEEDS 3 | LEE-30041 | 8 & 8 LED | 28 W | 2752 - 3350 lm | EW [99°x102°], M [30°], ME [122°x50°], T2 [129°x49°], T3 [112°x80°], T4 [89°x60°], W [56°] | 3000K CRI80, 4000K CRI80 | 1-10V, On/Off | 1.8 kg |  |
| LEEDS 5 | LEE-30051 | 12 & 12 LED | 39 W | 4090 - 4844 lm | EW [109°x102°], M [30°], ME [140°x62°], T2 [137°x58°], T3 [124°x86°], T4 [108°x66°], W [56°] | 3000K CRI80, 4000K CRI80 | On/Off | 2.0 kg |  |
| Down (Optic) & Up (Optic 2nd) - Square | | | | | | | | | |
| LEEDS 1 | LEE-30031 | 4 & 4 LED | 15 W | 1152 - 1590 lm | EW [99°x102°], M [30°], ME [122°x50°], T2 [129°x49°], T3 [112°x80°], T4 [89°x60°], W [56°] | 3000K CRI80, 4000K CRI80 | On/Off | 1.1 kg |  |
| Down - Rectangular | | | | | | | | | |
| LEEDS 4 | LEE-30011 | 8 LED | 14 W | 1376 - 1675 lm | EW [110°x103°], M [30°], ME [139°x60°], T2 [139°x55°], T3 [123°x85°], T4 [105°x69°], W [56°] | 3000K CRI80, 4000K CRI80 | DALI, 1-10V, On/Off | 1.5 kg |  |
| LEEDS 6 | LEE-30021 | 12 LED | 20 W | 2045 - 2422 lm | EW [109°x102°], M [30°], ME [140°x62°], T2 [137°x58°], T3 [124°x86°], T4 [108°x66°], W [56°] | 3000K CRI80, 4000K CRI80 | DALI, 1-10V, On/Off | 1.8 kg |  |
| Down - Square | | | | | | | | | |
| LEEDS 2 | LEE-30001 | 4 LED | 8 W | 576 - 795 lm | EW [99°x102°], M [30°], ME [122°x50°], T2 [129°x49°], T3 [112°x80°], T4 [89°x60°], W [56°] | 3000K CRI80, 4000K CRI80 | On/Off | 0.8 kg |  |


Accessories

| |  DALI Control System Control-DALI |  Surface mounting box for easy cabling (LEEDS 1) SCE-LEEDS-1 |  Surface mounting box for easy cabling (LEEDS 2) SCE-LEEDS-2 |  Surface mounting box for easy cabling (LEEDS 3) SCE-LEEDS-3 |  Surface mounting box for easy cabling (LEEDS 4) SCE-LEEDS-4 |  Surface mounting box for easy cabling (LEEDS 5) SCE-LEEDS-5 |  Surface mounting box for easy cabling (LEEDS 6) SCE-LEEDS-6 |
|-----------|---|--|--|--|--|--|--|
| LEE-30001 | | | | | | | |
| LEE-30011 | • | | | | | | |
| LEE-30021 | • | | | | | | |
| LEE-30031 | | • | | | | | |
| LEE-30041 | | | • | | | | |
| LEE-30051 | | | | | | • | |



LEEDS

LEEDS


LEEDS 1





LEEDS 2




LEEDS 3



LEEDS 4



LEEDS 5



LEEDS 6

