

LIGHTALK



Efficient quality linear fixture portfolio.
Coordinated in-ground range with multiple optics and component options.




Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Single cable entry, through wiring upon request or two cable entries for through wiring
- One IP67 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable for LA-60001, LA-60002, LA-60003, LA-60004
- Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable for LA-60013, LA-60014


- Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable for LA-60021, LA-60022, LA-60023, LA-60024, LA-60025, LA-60026
- Four IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable for LA-60031, LA-60032, LA-60033
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Recessing box is included

- Suitable for walk-over with a maximum load of 500 kg
- Remote driver for constant voltage (CV) 24V is not included for LA-60021, LA-60022, LA-60023, LA-60024, LA-60025, LA-60026
- DC24V constant current input
- DMX512 / RDM Control and address setting


Feature

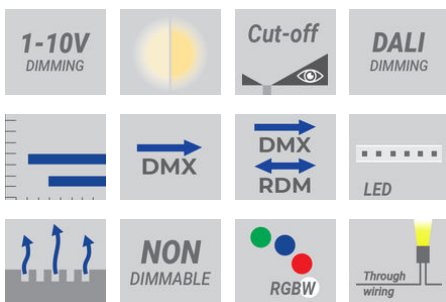

Light symbol

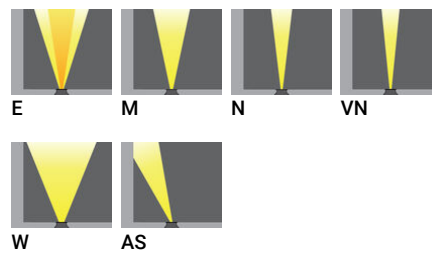

Product colour



LIGHTALK

Technical information







	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight		
With recessing box - With driver - Constant current(CC) 500 mA - 1250 mm - Class I - RGBW										
	LIGHTALK 2	LA-60014	2 x 20 LED	66 W	3302 - 3839 lm	E [18° x35°], M [25°], N [13°], VN [10°], W [43°]	RGBW30, RGBW40	DMX, DMX/RDM	7.4 kg	
With recessing box - With driver - Constant current(CC) 500 mA - 1250 mm - Class I										
	LIGHTALK 1	LA-60002	36 LED	57 W	3908 - 5703 lm	E [18° x35°], M [24°], N [14°], VN [12°], W [42°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	7.8 kg	
	LIGHTALK 1	LA-60004	36 LED	56 W	3573 - 3760 lm	AS [27°x60°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	7.8 kg	
With recessing box - With driver - Constant current(CC) 500 mA - 655 mm - Class I										
	LIGHTALK 1	LA-60001	18 LED	28 W	1943 - 2847 lm	E [18° x35°], M [24°], N [14°], VN [12°], W [44°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	4.6 kg	
	LIGHTALK 1	LA-60003	18 LED	28 W	2187 - 2566 lm	AS [27°x60°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	4.6 kg	
With recessing box - With driver - Constant current(CC) 500 mA - 655 mm - Class I - RGBW										
	LIGHTALK 2	LA-60013	20 LED	33 W	1592 - 1916 lm	E [16° x35°], M [24°], N [13°], VN [10°], W [43°]	RGBW30, RGBW40	DMX, DMX/RDM	4.9 kg	
With recessing box - Without remote driver - Constant voltage (CV) 24 V - 1250 mm - Class III										
	LIGHTALK 11	LA-60023	36 LED	55 W	3871 - 4975 lm	E [21° x 36°], M [25°], N [15°], VN [13°], W [42°]	3000K CRI80, 4000K CRI80	On/Off	7.1 kg	
	LIGHTALK 11	LA-60026	36 LED	55 W	10336 - 10880 lm	AS [27°x60°]	3000K CRI80, 4000K CRI80	On/Off	7.1 kg	
With recessing box - Without remote driver - Constant voltage (CV) 24 V - 1250 mm - Class III - RGBW										
	LIGHTALK 12	LA-60033	36 LED	70 W	1810 - 3896 lm	E [20°x30°], M [32°], N [16°], W [55°]	RGBW30, RGBW40, RGB+Amber	DMX, DMX/RDM	7.8 kg	
With recessing box - Without remote driver - Constant voltage (CV) 24 V - 455 mm - Class III										
	LIGHTALK 11	LA-60021	12 LED	16 W	1401 - 1823 lm	E [20° x 35°], M [26°], N [15°], VN [13°], W [43°]	3000K CRI80, 4000K CRI80	On/Off	2.4 kg	
	LIGHTALK 11	LA-60024	12 LED	16 W	1458 - 1535 lm	AS [27°x60°]	3000K CRI80, 4000K CRI80	On/Off	2.4 kg	
With recessing box - Without remote driver - Constant voltage (CV) 24 V - 455 mm - Class III - RGBW										
	LIGHTALK 12	LA-60031	12 LED	16 W	510 - 903 lm	E [20°x30°], M [32°], N [16°], W [55°]	RGBW30, RGBW40, RGB+Amber	DMX, DMX/RDM	3.2 kg	
With recessing box - Without remote driver - Constant voltage (CV) 24 V - 655 mm - Class III										
	LIGHTALK 11	LA-60022	18 LED	28 W	2202 - 2760 lm	E [20° x 36°], M [26°], N [15°], VN [13°], W [44°]	3000K CRI80, 4000K CRI80	On/Off	4.2 kg	
	LIGHTALK 11	LA-60025	18 LED	28 W	2584 - 2720 lm	AS [27°x60°]	3000K CRI80, 4000K CRI80	On/Off	4.2 kg	
With recessing box - Without remote driver - Constant voltage (CV) 24 V - 655 mm - Class III - RGBW										








LIGHTALK




LIGHTALK 12 **LA-60032** 18 LED 35 W 905 - 1948 lm E [20°x30°], M [32°], N [16°], W [55°] RGBW30, RGBW40, RGB+Amber DMX, DMX/RDM 4.6 kg



Accessories

							
LA-60001							•
LA-60002							•
LA-60003							•
LA-60004							•
LA-60013							
LA-60014							
LA-60021	•	•	•	•	•	•	
LA-60022	•	•	•	•	•	•	
LA-60023	•	•	•	•	•	•	
LA-60024	•	•	•	•	•	•	
LA-60025	•	•	•	•	•	•	
LA-60026	•	•	•	•	•	•	
LA-60031		•	•	•			
LA-60032		•	•	•			
LA-60033		•	•	•			

							
LA-60001	•						
LA-60002	•						
LA-60003	•						
LA-60004	•						
LA-60013							
LA-60014							
LA-60021		•	•	•	•	•	•
LA-60022		•	•	•	•	•	•
LA-60023		•	•	•	•	•	•
LA-60024		•	•	•	•	•	•
LA-60025		•	•	•	•	•	•
LA-60026		•	•	•	•	•	•
LA-60031							
LA-60032							
LA-60033							

			
LA-60001	•		
LA-60002	•		

We reserve the right to make technical and design changes.

01:14, 30-01-2023

<https://www.ligman.com/lighttalk-in-ground-luminaires-li-in3/>

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prew,
24150 Chachoengsao - Thailand
info@ligman.com


INDIA
LIGMAN India Illumination Systems Private Ltd.
D-35, EPIP Site V, Kasna Industrial Estate,
Gautam Budh Nagar, U.P. 201306 Greater Noida - India
sales.in@ligman.com

LIGHTALK


LA-60003	.		
LA-60004	.		
LA-60013	.	.	.
LA-60014	.	.	.
LA-60021			
LA-60022			
LA-60023			
LA-60024			
LA-60025			
LA-60026			
LA-60031	.	.	.
LA-60032	.	.	.
LA-60033	.	.	.

LIGHTALK


LIGHTALK 1

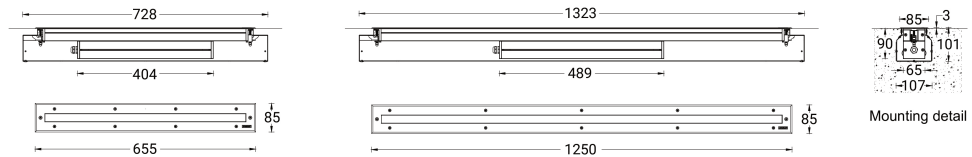


LIGHTALK 2

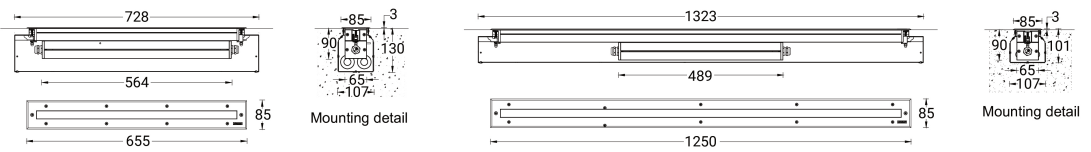

LIGHTALK 11

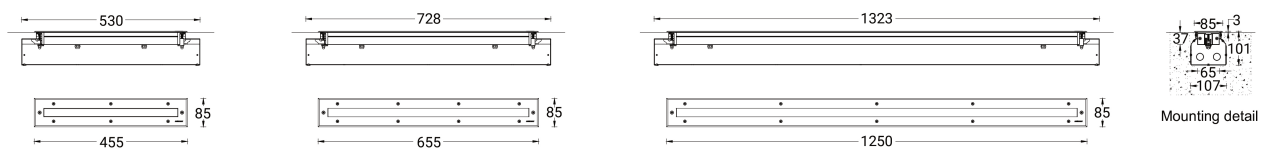

LIGHTALK 12

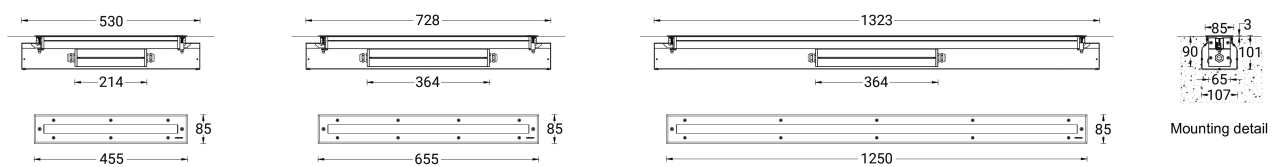

LIGHTALK

LIGHTALK
Recessed luminaires

Efficient quality linear fixture portfolio.
Coordinated wall or ceiling recessed range with
multiple optics and component options.

<https://www.ligman.com/lighttalk-recessed-luminaires-li-re3/>



LIGHTALK
Pendant luminaires

Efficient quality linear fixture portfolio.
Coordinated pendant range with multiple optics
and component options.

<https://www.ligman.com/lighttalk-pendant-luminaires-li-pe3/>



LIGHTALK
Wall washer floodlights

Efficient quality linear fixture portfolio.
Coordinated grazing-floodlight range with multiple
optics and component options.

<https://www.ligman.com/lighttalk-wall-washer-floodlights-li-pr3/>