

NORDSTROM 4 (NOD-50032)



Product description

Integral control gear - 145x145 mm - Class I - RGBW




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single cable entry, through wiring upon request


- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable for NOD-50001, NOD-50011, NOD-50021, NOD-50031
- One IP68 connector supplied with 0.2 m of 8x0.5 sqmm outdoor cable for NOD-50002, NOD-50012, NOD-50022, NOD-50032
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket

- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear


Light symbol

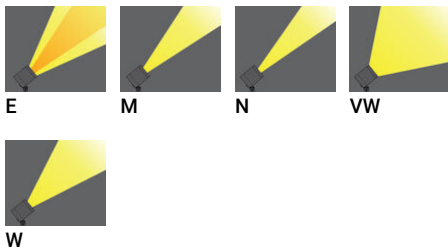

Product colour

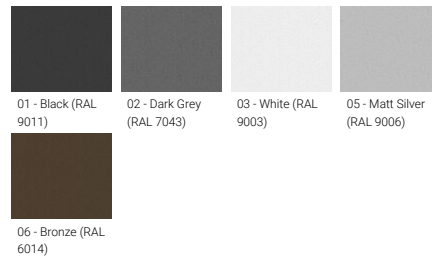

Special finishes upon request

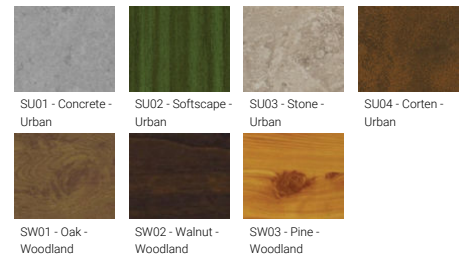


NORDSTROM 4 (NOD-50032)

Technical information

Material	Aluminium	Optic	E, M, N, VW, W	CIE flux code n°3	100
Light source	16 LED	Optic value	17°, 26°, 43°x11°, 65°, 8°	Dimming type	DMX, DMX/RDM
Power (Luminaire)	28 W	Optic (2nd)	M, VW, W	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Lumen (Luminaire)	1322 - 1600 lm	Optic (2nd) value	23°, 32°, 43°		
Luminaire luminous efficacy	47 - 57 lm/W	CCT / CRI	RGBW30, RGBW40	Weight	3.6 kg
Driver option	Integral control gear	Bug	B1-U0-G0	Operating temperature	-20 °C to 40 °C
Driver	Constant current (CC)	ULR	0%	Through wiring	Single cable entry, through wiring upon request
Input voltage	220-240 V 50/60 Hz	ULOR	0%	Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
				Variants (DMX/RDM)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

NOD-50032

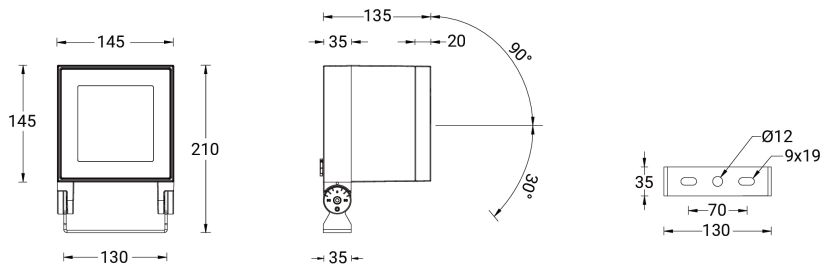

Accessories



DMX Control System
Control-DMX




DMX/RDM Control System
Control-DMX-RDM



Ground spike
A50441



Linear spread lens
A51414

NORDSTROM 4 (NOD-50032)

Honeycomb louvre
A52121



Anti-glare visor
A53131

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.