


# RADO




Sturdy classic wall-recessed pathway and stair luminaire. Simple pleasing aesthetic and sturdy construction, perfect for retrofit applications with its multiple sizes offered.




## Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear


## Feature

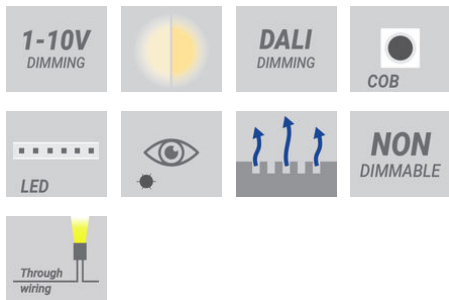


## Light symbol

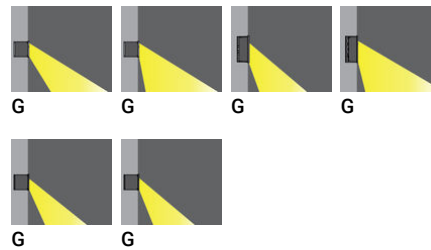

## Product colour

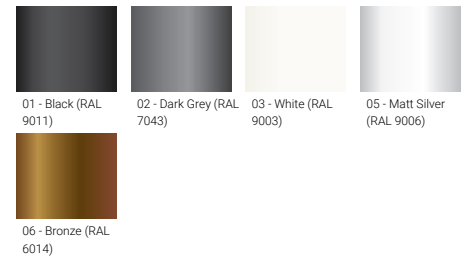



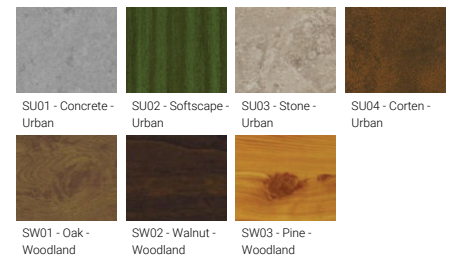

## Special finishes upon request



# RADO

## Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
<b>With locking clamp</b>								
RADO 7	<b>RA-40711</b>	1 COB	20 W	1382 - 1399 lm	G [42°x69°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	4.6 kg.
RADO 7	<b>RA-40712</b>	1 COB	38 W	2082 - 2192 lm	G [48°x75°]	3000K CRI80, 4000K CRI80	On/Off	4.6 kg
<b>With recessing box</b>								
RADO 1	<b>RA-40531</b>	1 COB	4 W	124 - 133 lm	G [36°x50°]	3000K CRI80, 4000K CRI80	1-10V, On/Off	1.0 kg
RADO 2	<b>RA-40542</b>	4 x 12 LED	17 W	558 - 620 lm	G [23°x94°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	1.2 kg 
RADO 3	<b>RA-40552</b>	3 x 12 LED	13 W	502 - 540 lm	G [50°x80°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	2.0 kg 
RADO 4	<b>RA-40562</b>	4 x 12 LED	27 W	768 - 853 lm	G [50°x75°]	3000K, 4000K	DALI, 1-10V, On/Off	4.0 kg 
RADO 5	<b>RA-40582</b>	4 x 12 LED	17 W	402 - 447 lm	G [32°x88°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	1.4 kg 
RADO 6	<b>RA-40692</b>	30 LED	11 W	438 - 471 lm	G [31°x88°]	3000K CRI80, 4000K CRI80	On/Off	2.5 kg
RADO 7	<b>RA-40701</b>	1 COB	20 W	1382 - 1399 lm	G [42°x69°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	6.5 kg
RADO 7	<b>RA-40702</b>	1 COB	38 W	2082 - 2192 lm	G [48°x75°]	3000K CRI80, 4000K CRI80	On/Off	6.5 kg

## Accessories



DALI Control System  
**Control-DALI**



RA-40531  
RA-40542  
RA-40552  
RA-40562  
RA-40582  
RA-40692  
RA-40701  
RA-40702  
RA-40711  
RA-40712

•  
•  
•  
•  
•  
•  
•  
•

**RADO**



**RADO**

**RADO 1**





Recessing box

**RADO 2**





Recessing box

**RADO 3**





Recessing box

**RADO 4**





Recessing box

**RADO 5**





Recessing box

**RADO 6**




Recessing box

**RADO 7**



Recessing box

**RADO 7 Locking clamp**

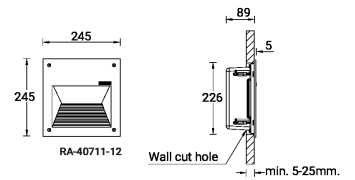

RADO 7 (RA-40711-12)  
Wall cut hole 226x226mm.

**RADO**

---

**RADO**  
**Bollards**

---

Sturdy classic bollard pathway and stair luminaire. Simple pleasing aesthetic and sturdy construction, perfect for delineating perimeter applications.

<https://www.ligman.com/rado-bollards-ra-bo3/>

**THAILAND**

LIGMAN Lighting Co.,Ltd.  
17/2 Moo 4, Monthong, Bang Nam Preaw,  
24150 Chachoengsao - Thailand  
[info@ligman.com](mailto:info@ligman.com)

**INDIA**

LIGMAN India Illumination Systems Private Ltd.  
D-35, EPIP Site V, Kasna Industrial Estate,  
Gautam Budh Nagar, U.P. 201306 Greater Noida - India  
[sales.in@ligman.com](mailto:sales.in@ligman.com)