

SKY

Family of low glare
contemporary luminaires

IP66 | IK10 | CLASS I/II

Features:

- Decorative post top luminaire
- Low glare, indirect light source focusing on quality of light

Light source:

Bridgelux VERO 18

Optical control:

Symmetric

180° back shield available

Light output:

Colour temp.	CRI	Lumen Output
2700k	85Ra typ. (80Ra min.)	1650 - 3900
3000k	85Ra typ. (80Ra min.)	1700 - 4100
4000k	85Ra typ. (80Ra min.)	1800 - 4300

L80 (B10) lifetime prediction:

In excess of 100,000 hours (@ T_a 25 °C)

Driver

Philips Xi Fully Programmable

CLO enabled

Surge Protection: 8kV standard (10kV available)

Switching and control:

Programmable

Dimmable: 1-10V / Dali

CMS

Mounting:

Ø60mm post top

Ø90mm post top (requires Ø60mm spigot)



Colours:

YW355F Graphite grey

Y2370I Silver grey

SN351F Black (Noir 900 Sablé)

YX355F Corten brown (Mars 2525)


RAL colours available on request

Materials:

Body: High pressure die-cast aluminium

Glazing: Clear polycarbonate with UV-resistant acrylic

Dimensions:

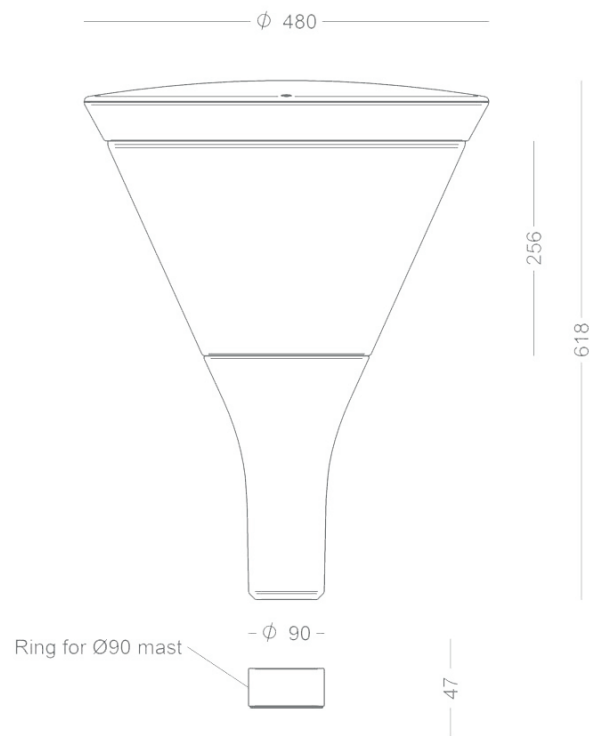

Weight:

8.4kg

Windage:

0.143m²

DW Windsor

Pindar Road, Hoddesdon, Hertfordshire, EN11 ODX

T: +44(0)1992 474600 | E: info@dw Windsor.com

dw Windsor.com



Sky Wall

IP66 | IK10 | CLASS I/II

Features:

- Decorative wall mounted luminaire
- Low glare, indirect light source focusing on quality of light

Light source:

Bridgelux VERO 18

Optical control:

Symmetric

180° back shield available

Light output:

Colour temp.	CRI	Lumen Output
2700k	85Ra typ. (80Ra min.)	1650 - 3900
3000k	85Ra typ. (80Ra min.)	1700 - 4100
4000k	85Ra typ. (80Ra min.)	1800 - 4300

L80 (B10) lifetime prediction:

In excess of 100,000 hours (@ T_a 25 °C)

Driver

Philips Xi Fully Programmable

CLO enabled

Surge Protection: 8kV standard (10kV available)

Switching and control:

Programmable

Dimmable: 1-10V / Dali

CMS

Mounting:

Wall mounted

Colours:

YW355F Graphite grey

Y2370I Silver grey

SN351F Black (Noir 900 Sablé)

YX355F Corten brown (Mars 2525)

RAL colours available on request


Materials:

Body: High pressure die-cast aluminium

Glazing: Clear polycarbonate with UV-resistant acrylic

Installation and maintenance:

5 x 2,5 mm² into terminal block

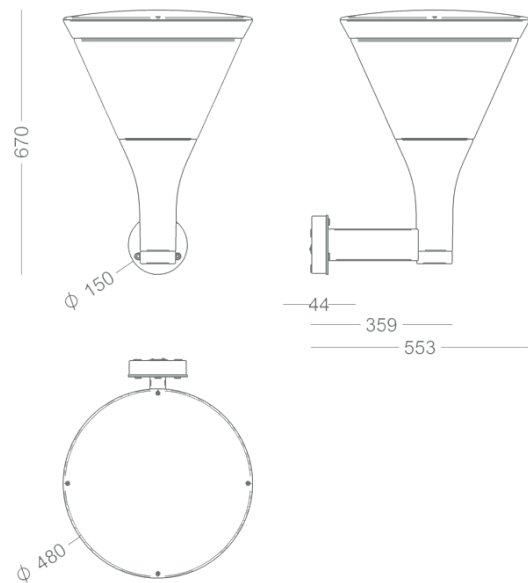

Weight:

9.7kg

Windage:

0.143m²

DW Windsor

Pindar Road, Hoddesdon, Hertfordshire, EN11 ODX

T: +44(0)1992 474600 | E: info@dw Windsor.com

dw Windsor.com



Sky Bollard

IP66 | IK10 | CLASS I/II

Features:

- Decorative LED Bollard
- Low glare, indirect light source focusing on quality of light

Light source:

Bridgelux V8

Optical control:

Symmetric

Light output:

Colour temp.	CRI	Lumen Output
2700k	90Ra	565 - 745
3000k	90Ra	585 - 775

L80 (B10) lifetime prediction:

In excess of 50,000 hours (@ T_a 25°C)

Driver

350 / 500mA

Dimmable upon request

Mounting:

Root mounting

Flange plate mounted

Colours:

YW355F Graphite grey

Y2370I Silver grey

SN351F Black (Noir 900 Sablé)

YX355F Corten brown (Mars 2525)

RAL colours available on request


Materials:

Top: High pressure die-cast aluminium

Bollard: Galvanised steel

Glazing: Clear polycarbonate with UV-resistant acrylic

Dimensions:

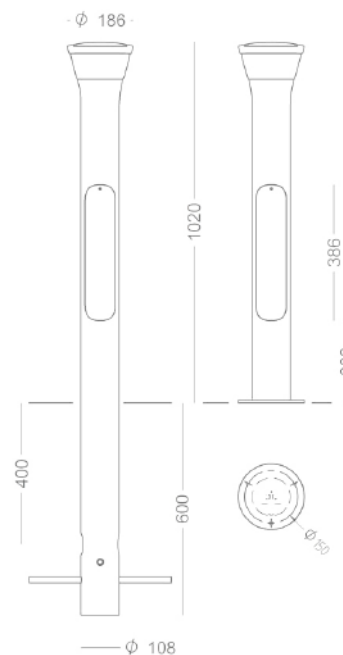

Weight:

10kg

DW Windsor

Pindar Road, Hoddesdon, Hertfordshire, EN11 ODX

T: +44(0)1992 474600 | E: info@dw Windsor.com

dw Windsor.com

