




Beak Street, London

- Robust copper construction for enhanced corrosion resistance and longevity
- Exceptional ease of maintenance via hinged canopy with retaining stay and slide latches
- Ingress Protection – one piece glazing and silicone gasket ensure whole lantern sealed to IP65
- Frog and cast base have external connector blocks for ease of installation



Optional cast base

### Diamond Optic®



Diamond Optic® reflector system reduces light pollution and allows increased column spacings. See pages 16-19 for full details.

### Windsor Product Codes

Street	Avenue	Windsor	Example
<b>1. Model</b>			
WIS	WIA		WIS
<b>2. Mounting</b>			
F	F	Frog	F
C		Cast Base	
<b>3. Lamp</b>			
050S	050S	50w SON-T+	070S
070S	070S	70w SON-T+/CDO-TT	
100S		100w SON-T+/CDO-TT	
150S		150w SON-T+/CDO-TT	
070H	070H	70w HQI-E	
100H		100w HQI-E	
150H		150w HQI-E	
035C	035C	35w CDM-T	
070C	070C	70w CDM-T	
150C		150w CDM-T	
042P	042P	42w PL-T	
057P	057P	57w PL-T	
045W		45w CosmoWhite	
060W		60w CosmoWhite	
090W		90w CosmoWhite	
<b>4. Colour/Finish</b>			
11	11	RAL 9017 Black*	11
02	02	Natural copper	
03	03	Polished & lacquered copper	
<b>5. Diamond Optic® Setting</b>			
A	A	5/35	A
B	B	10/10	
C	C	31/35	
D	D	5/25	
<b>6. Photocell</b>			
C	C	Yes	C
N	N	No	


Open front cover flap for our guide to using this table. For non-standard codes, call us on 01992 474600.

#### Example Code:

- 1. WIS** Windsor Street
- 2. F** Frog mounted
- 3. 070S** 70w SON-T+/CDO-TT
- 4. 11** Painted RAL 9017 Black
- 5. A** Diamond Optic® setting A with Photocell
- 6. C**

= **WIS F 070S 11 A C**



\* For an alternative colour, replace 11 with the two digit number of the colour you require

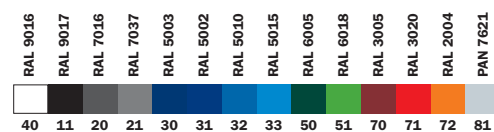

This product is available in the colours listed on the opposite page, as well as any other colour from our full standard range, shown here, to special order. See inside cover flap for details.

### Suggested column/bracket options

For full range of columns and brackets see page 162

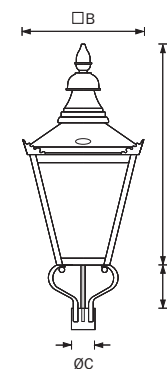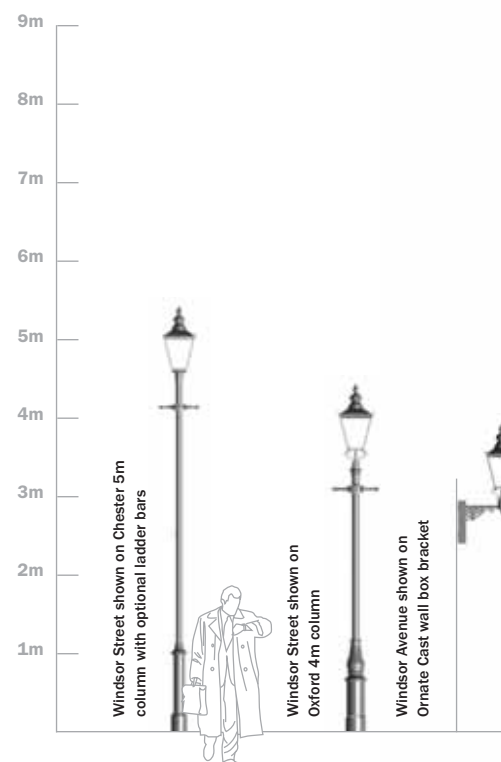

Variant	Dimensions (mm)				Weight (kg)	Windage
	A	B	C	D		
Street	833	440	76	188	10.3	0.28m <sup>2</sup>
Avenue	745	390	76	119	8.3	0.22m <sup>2</sup>

# Windsor

IP65 IK08  
CLASS I

heritage

### Options

**Sizes:**  
**Windsor Street**  
For mounting at 4 - 6 metres  
Maximum lamp wattage: 150w

**Windsor Avenue**  
For mounting at 2.5 - 4 metres  
Maximum lamp wattage: 70w

**Glazing:**  
Polycarbonate one piece bowl (standard)  
Acrylic one piece bowl

**Optical control:**  
Diamond Optic® (standard)  
Small skirt refractor

**Lamp:**  
45, 60, 90w CosmoWhite  
50, 70, 100, 150w SON-T+  
70, 100, 150w HQI-E  
35, 70, 150w CDM-T  
70, 100, 150w CDO-TT  
42, 57w PL-T

**Mounting:**  
Traditional frog (standard)  
Cast base (Windsor Street only)  
[76 mm Ø]

**Colours:**  
RAL 9017 Black  
RAL 5003 Sapphire Blue  
RAL 6005 Light Moss Green  
Natural Copper finish\*\*  
Polished and Lacquered Copper finish

\*\* NB Natural copper finish will rapidly weather usually giving a rich patina finish to the copper

**Other:**  
Electronic gear, some models

Miniature photocell  
Obtrusive light shield(s)

Zebra crossing version available.  
See page 36-39 for details

### Materials

**Body:** Copper  
**Standard frog:** Metal sprayed steel  
**Cast base:** Cast aluminium  
**Access:** Hinged sealed canopy  
**Seals:** Silicone rubber  
**Finish:** Polyester powder coated or copper  
Contact us for electronic control systems

dwwindsor.co.uk  
answers@dwwindsor.co.uk