




- For ease of installation and accurate luminaire alignment, Easy-fit™ entry connector fitted as standard
- Choice of entries including unique 45° angled entry for more innovative mounting options
- Flat glass glazing for zero light pollution
- Ingress Protection – whole luminaire sealed to IP65

Diamond Optic®

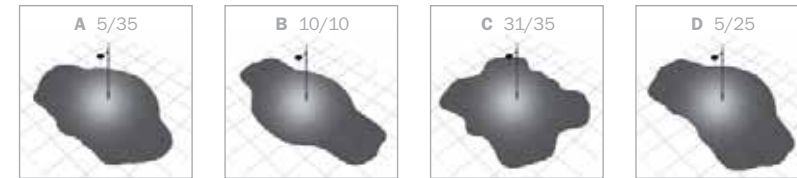

Diamond Optic® reflector system reduces light pollution and allows increased column spacings. See pages 16-19 for full details.

Akord Bullet Product Codes

Akord Bullet		Example	
1. Model			
ABU		ABU	
2. Mounting			
S	Side Entry Easy-fit™	4	
E	Top Entry Easy-fit™		
4	45° Easy-fit™		
3. Lamp			
050S	50w SON-T+	042P	
070S	70w SON-T+/CDO-TT		
050H	50w HQI-E		
070H	70w HQI-E		
035C	35w CDM-T		
070C	70w CDM-T		
042P	42w PL-T		
045W**	45w CosmoWhite		
060W**	60w CosmoWhite		
4. Colour			
72	RAL 2004 Pure Orange*	72	
5. Diamond Optic® Setting			
A	5/35	D	
B	10/10		See inside cover
C	31/35		for details
D	5/25		


Open front cover flap for our guide to using this table. For non-standard codes, call us on 01992 474600.

Example Code:
1. ABU Akord Bullet
2. 4 with 45° Easy-fit™ Entry
3. 042P 42w PL-T
4. 72 Painted RAL 2004 Pure Orange
5. D Diamond Optic® setting D

= ABU 4 042P 72 D

* For an alternative colour, replace 72 with the two digit number of the colour you require

** Supplied with remote gear



This product is available in the colours listed on the opposite page, as well as any other colour from our full standard range, shown here, to special order. See inside cover flap for details.

Akord Bullet

IP65 IK08
CLASS I

modern

Options

Size:
Akord Bullet
 For mounting at 4 - 6 metres
 Maximum lamp wattage: 70w

Glazing:
 Flat toughened glass

Optical control:
 Diamond Optic®

Lamp:
 45, 60w CosmoWhite
 50, 70w SON-T+
 50, 70w HQI-E
 35, 70w CDM-T
 70w CDO-TT
 42w PL-T

Mounting:
 Easy-fit™ side entry, top entry & angled entry (45°) [42.4mm Ø]

Finish (top casting):
 PAN 7621 Metallic Silver Grey

Finish (canopy):
 RAL 9017 Black
 RAL 7016 Anthracite Grey
 RAL 5002 Ultramarine Blue
 RAL 5015 Sky Blue
 RAL 6005 Light Moss Green
 RAL 3020 Traffic Red
 RAL 2004 Pure Orange
 PAN 7621 Metallic Silver

Other:
 A range of dedicated brackets is available for Akord Bullet see page 183

Materials

Canopy:
 Spun aluminium

Top casting:
 Cast aluminium

Entry:
 Corrosion protected steel

Access:
 Stainless steel quarter turn screws



Seals:
 Silicone rubber

Finish:
 Polyester powder coated



Suggested column/bracket options

For full range of columns and brackets see page 162

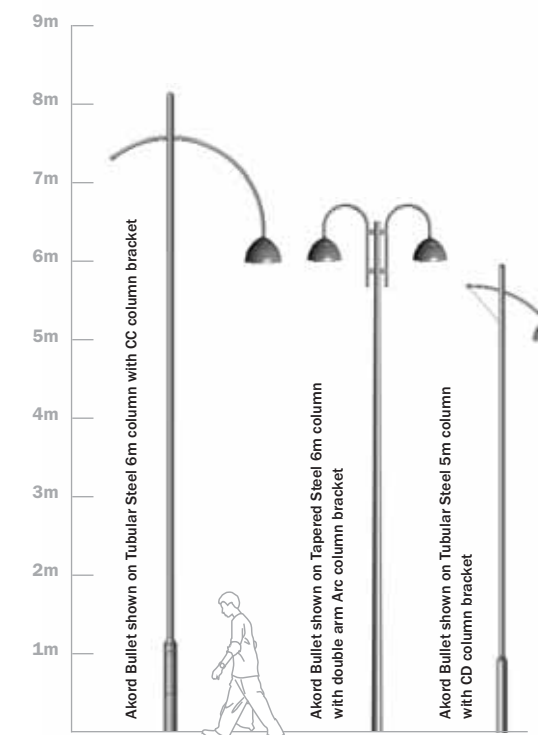

Dimensions (mm)		Weight (kg)	Windage
A	B		
310	430	9	0.10m²

dwwindsor.co.uk
 answers@dwwindsor.co.uk