



- High frequency control gear fitted as standard
- Flush fit to mounting surface and tough polycarbonate diffuser for protection against vandalism
- Optimum opaqueness of diffuser to maximise light output whilst concealing the lamp




Aventis Eyelid



Aventis Grille

Distribution

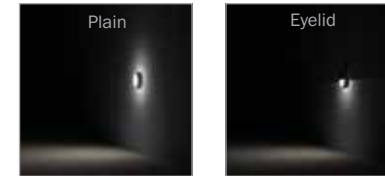

Aventis Product Codes

Large	Small	Aventis	Example
1. Model			
AVL	AVS		AVL
2. Style			
P	P	Plain	G
G	G	Grille	
E	E	Eyelid	
3. Lamp			
028D		1 x 28w 2D	028DE
038D		1 x 38w 2D	
028DE		1 x 28w 2D EMR	
038DE		1 x 38w 2D EMR	
	010P	1 x 10w PL-C	
	013P	1 x 13w PL-C	
	018P	1 x 18w PL-C	
218P		2 x 18w PL-C	
226P		2 x 26w PL-C	
4. Colour			
10	10	Black	82
82	82	Aluminium	

Open front cover flap for our guide to using this table. For non-standard codes, call us on 01992 474600.

Example Code:
1. AVL Aventis Large
2. G with Grille
3. 028DE 1 x 28w 2D EMR
4. 82 Painted Aluminium
= AVL G 028DE 82



Aventis

IP65 IK10
CLASS I

amenity

Options

Sizes:
Aventis Large
 Maximum lamp wattage: 2 x 26w

Aventis Small
 Maximum lamp wattage: 1 x 18w

Glazing:
 UV stabilised opal polycarbonate diffuser

Lamp:
 28, 38w 2D
 28, 38w 2D EMR (integral emergency)
 1 x 10, 1 x 13, 1 x 18w PL-C
 2 x 18, 2 x 26w PL-C

Colours:
 Black
 Aluminium

Materials

Body:
 Corrosion protected die cast aluminium


Diffuser:
 UV stabilised opal polycarbonate

Access:
 Stainless steel Allen screws

Seals:
 Silicone rubber

Finish:
 Polyester powder coated

Control Gear:
 High frequency electronic

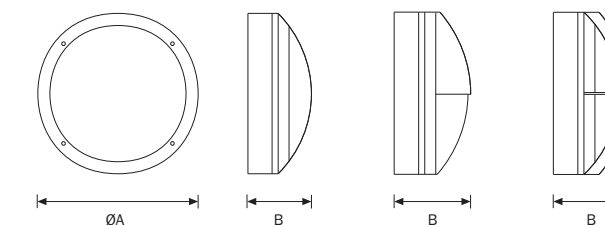

	Dimensions (mm)		Weight (kg)			Dimensions (mm)		Weight (kg)	
	A	B				A	B		
Large					Small				
Plain	360	145	3.7	4.7*		265	100		1.5
Eyelid	360	155	4.5	5.5*		265	105		1.9
Grille	360	170	4.5	5.5*		265	120		1.9

* with emergency gear