



Madley Park, Witney

- Available with Easy-fit™ connector for ease of installation and accurate luminaire alignment
- Exceptional ease of maintenance via stainless steel over-centre latches
- Ingress Protection – whole luminaire sealed to IP65



Optional straight glazing bowl

### Diamond Optic®



Diamond Optic® reflector system reduces light pollution and allows increased column spacings. See pages 16-19 for full details.

When fitted with 100w SON-T+ or CDO-TT lamps, Diamond Optic® setting A is unavailable and Diamond Optic® Setting C (31/35) is restricted to 25/25 due to the size of the lamp and lampholder, resulting in a slightly altered distribution pattern.

### Iffley Product Codes

Iffley		Example	
<b>1. Model</b>			
IFF		IFF	
<b>2. Mounting</b>			
E	Top Entry Easy-fit™	E	
T	Top Entry Threaded		
<b>3. Lamp</b>			
050S	50w SON-T+	070S	
070S	70w SON-T+/CDO-TT		
100S	100w SON-T+/CDO-TT**		
050H	50w HQI-E		
070H	70w HQI-E		
100H	100w HQI-E**		
035C	35w CDM-T		
070C	70w CDM-T		
042P	42w PL-T		
045W	45w CosmoWhite**		
060W	60w CosmoWhite**		
090W	90w CosmoWhite**		
<b>4. Colour</b>			
11	RAL 9017 Black*	11	
<b>5. Diamond Optic® Setting</b>			
A	5/35	A	
B	10/10		See inside cover
C	31/35		for details
D	5/25		
<b>6. Photocell</b>			
C	Yes	C	
N	No		


Open front cover flap for our guide to using this table. For non-standard codes, call us on 01992 474600.

#### Example Code:

- 1. IFF** Iffley
- 2. E** Top Entry Easy-fit™
- 3. 070S** 70w SON-T+/CDO-TT
- 4. 11** Painted RAL 9017 Black
- 5. A** Diamond Optic® setting A with Photocell
- 6. C**

= **IFF E 070S 11 A C**



\* For an alternative colour, replace 11 with the two digit number of the colour you require



This product is available in the colours listed on the opposite page, as well as any other colour from our full standard range, shown here, to special order. See inside cover flap for details.

### Suggested column/bracket options

For full range of columns and brackets see page 162

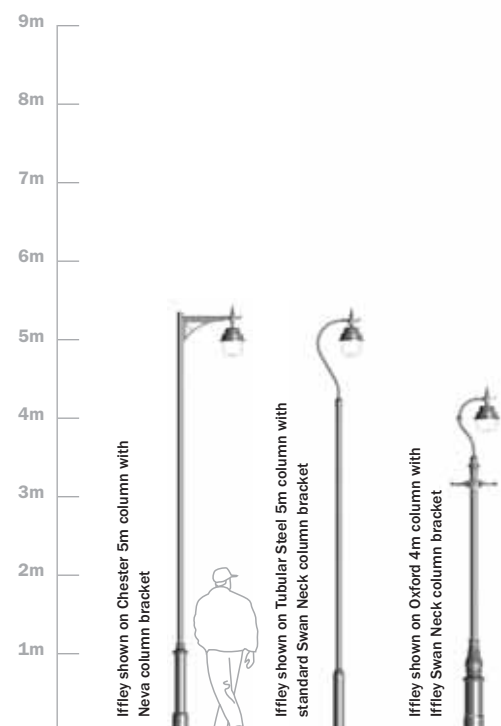

Dimensions (mm)			Weight (kg)	Windage
A	A*	B		
320	378	324	4.9	0.09m <sup>2</sup>

\* Straight glazing

# Iffley

IP65 IK07  
CLASS I

urban classic

### Options

**Size:**  
**Iffley**  
For mounting at 2.5 - 6 metres  
Maximum lamp wattage: 100w

**Glazing:**  
Polycarbonate curved glazing bowl (standard)  
Polycarbonate straight glazing bowl

**Optical control:**  
Diamond Optic®

**Lamp:**  
45\*\*, 60\*\*, 90w\*\* CosmoWhite  
50, 70, 100w\*\* SON-T+  
50, 70, 100w\*\* HQI-E  
35, 70w CDM-T  
70, 100w\*\* CDO-TT  
42w PL-T

\*\* Supplied with remote gear tray

**Mounting:**  
Easy-fit™ entry [42.4 mm Ø]  
Threaded entry [1" BSP]

**Colours:**  
RAL 9017 Black  
RAL 7016 Anthracite Grey  
RAL 7037 Dusty Grey  
RAL 6005 Light Moss Green

**Other:**  
Electronic gear, some models

Miniature photocell  
Obtrusive light shield(s)

Zebra crossing version available.  
See page 36-39 for details

### Materials

**Body:**  
Spun aluminium

**Entry:**  
Corrosion protected steel

**Access:**  
Body coloured stainless steel  
over-centre latches

**Seals:**  
Silicone rubber

**Finish:**  
Polyester powder coated

dwwindsor.co.uk  
answers@dwwindsor.co.uk