




Petra

Q8 Building, Balliol Business Park, Newcastle

architectural



- Side lighting options suitable for lighting path and driveways
- Convex etched glass for diffuse lighting effect

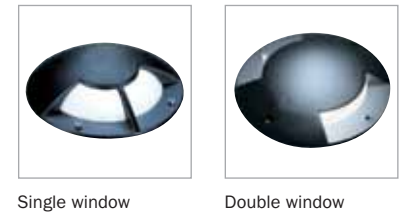

Distribution



Petra

IP67 IK10
CLASS I

architectural


Options

- Styles:**
 Radial spoke
 Single window
 Double window
- Glazing:**
 Curved etched toughened glass
- Lamp:**
 35w HQI-T, CDM-T
 18, 26w PLC
- Colours:**
 RAL 9005 Black
 RAL 9006 Aluminium
 RAL 7016 Anthracite Grey


Materials

- Body:**
 Corrosion protected die cast aluminium
- Bezel:**
 Corrosion protected die cast aluminium
- Sump tube:**
 Nylon
- Access:**
 Stainless steel Allen screws
- Seals:**
 Silicone rubber
- Cable Entry:**
 M20 gland for Ø10 - 14mm round cable
- Finish:**
 Polyester powder coated

Installation




Can withstand the load of a 2500kg vehicle travelling at 6mph

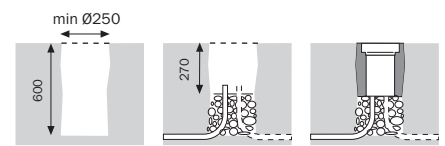

It is necessary to provide a gravel sump approximately 33cm deep to ensure good drainage and to avoid water stagnation.

Supplied with two cable glands to allow loop-in, loop-out wiring

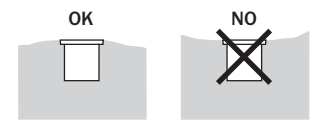

Must not be installed in a depression.

Petra Product Codes

Petra		Example
1. Model		
PET		PET
2. Style		
R	Radial spoke	R
S	Single window	
D	Double window	
3. Lamp		
035C	35w HQI-T/CDM-T	026P
018P	18w PLC	
026P	26w PLC	
4. Colour		
10	RAL 9005 Black	26
26	RAL 9006 Aluminium	
20	RAL 7016 Anthracite Grey	

Open front cover flap for our guide to using this table.

Example Code:
 1. **PET** Petra
 2. **R** with Radial Spoke
 3. **026P** 26w PLC
 4. **26** Painted RAL 9006 Aluminium
 = **PET R 026P 26**

