

## Fira Pro Flood VIVID COLOUR & TUNABLE WHITE

COMPACT LED FLOOD FOR ARCHITECTURAL LIGHTING



FIRA PRO FLOOD

A high performance internally mixed 4 colour LED floodlight using Red, Green, Blue, (Amber or White) **(CRI90+)** LEDs.

### KEY FEATURES



### LED COLOUR OPTIONS



### FINISH OPTIONS



### LIGHT QUALITY BEST IN CLASS

Calling upon our 45+ years of lighting expertise, our custom light engines deliver vibrant, internally mixed colour, smooth dimming and exceptional light output.

### HIGH PERFORMANCE

Flicker Free

**100,000 hours** L70 at 50°C

Single bin selected LEDs for colour consistency.

### TRUE THERMAL DESIGN

Venturi thermal design for maximum cooling and silent running. Separated compartments for the LEDs and control electronics. Intelligent thermal management.

### DURABLE AND RELIABLE

Waterproof to IP66 with an IK9 rating

Cast LM6 aluminium

Corrosion resistant as standard

Toughened glass & marine grade fasteners.

### CUSTOMISE TO YOUR SPECIFICATION

RAL paint finishes

Bespoke mounting brackets

Comprehensive range of beam angles are available










Single colour options.

### UK DESIGN & MANUFACTURE

The Fira Pro range of products are designed and manufactured in **Hertfordshire, UK.**

## Fira Pro Flood VIVID COLOUR & TUNABLE WHITE

COMPACT LED FLOOD FOR ARCHITECTURAL LIGHTING

Options	Light Engine	LED Type	 Quad VC RGBW 5700K	 Quad VC RGBW 2700K	 Quad VC RGBW 1700K	 TW A 1700K W 2700K C 5700K	 Custom
		No. of LEDs	16	16	16	16	On enquiry
		CRI	90+ (white)	90+ (white)	-	90+ (CW)	On enquiry
		Wavelength CCT (Colour Temp K)	R 624 - 634nm G 525 - 530nm B 445 - 450nm Cool W - 5700K	R 624 - 634nm G 525 - 530nm B 445 - 450nm Warm W - 2700K	R 624 - 634nm G 525 - 530nm B 445 - 450nm Amber - 1700K	Amber - 1700K Warm - 2700K Cool - 5700K	Custom single and multiple population
		Lumen output (All)	1078 lm	896 lm	834 lm	1660 lm	On enquiry
		Lumen maintainance	100,000 hours L70 at 50° C (Projected lifetime based on extrapolated LM-80 data)				
	Optics	Circular	12°	20°	40°	80°	Custom
		Elliptical	12° x 60°	60° x 12°			On enquiry
	Body Finish	RAL Reference	 9005 Black	 9006 Silver	 9016 White		 CUSTOM
		Finish	MN805L matt	SW262D matt	MA816E matt		On enquiry
		Material	AkzoNobel polyester exterior grade powder coat				
Specifications	Electrical	Power input	120 - 277 V AC @ 50/60Hz.				
		Wattage	30W.				
		Control	DMX 512 - 4 channels (VC) 3 channels (TW) Resolution - 8 bit (with intelligent smoothing) RDM - Remote Device Management for easy setup Thermal - Automatic Thermal Management built in.				
		Connection	Combined Power and DMX, provided on a QuickLINK+ connector.				
	Physical	Weight & Dimensions	4.4 kgs (9.7lbs) 212mm (H) x 175mm (W) x 106mm (D) (including yoke).				
		Material and finish	Cast LM6 aluminium, powder coated - corrosion pre-treatment as standard.				
		Mount options	Multi-purpose bracket.				
		Lens and front glass	Acrylic lenses and toughened front glass to IK9.				
		Temperature range	-20 to +50°C.				
		Ingress protection	IP66 - Dry conditions and damp or wet interior/exterior environments.				
Accessories	Installation	Mounting Yoke	Integral mounting yoke allowing the pan and tilt rotation of the luminaire.				
	Connection Kits	1m QuickLINK+ Cable	A 1metre long QuickLINK+ cable, one end is bare to enable the connection to existing wiring.				
		IP Enclosure +1m QuickLINK+	An IP66 wiring enclosure with a 1m QuickLINK+ tail to plug into Pulsar luminaires.				
		IP Enclosure +1m QuickLINK+ with QuickLINK Tails	An IP66 wiring enclosure with a 1m QuickLINK+ tail to plug into Pulsar luminaires. This variant also has QuickLINK tails so that the luminaires can be daisy chained together with a single cable run.				
		LuxCONNECT Wireless	A wireless DMX controller fitted within an IP65 enclosure. Controlled via the Casambi app.				
	Optical Control	Louvre	Individual baffles for each LED cluster to minimise glare.				
		Snoot	A baffle that fits around the luminaire to reduce off-axis glare.				
		Half Snoot	A baffle that reduces off-axis glare from the top of the luminaire only.				

## Fira Pro Flood VIVID COLOUR & TUNABLE WHITE

COMPACT LED FLOOD FOR ARCHITECTURAL LIGHTING

PART NUMBERS - Fira Pro & Fira Ultra

### PART NUMBER STRUCTURE

OPTIONS	DESCRIPTION	LSQU	XXX.	XXXX.	XX.	XXXX.	XXX.	XX.	XX
FIRA	Fira luminaire	FIRA							
104 / 109	Luminaire size - 104 (Pro), 109 (Ultra)		XXX.						
RDM2	Control - DMX + RDM			XXXX.					
VC / A3 / A1 / TW	LED (VC=RGBW57K, A3=RGBW27K, A1=RGBA17K, TW=Tunable White)				XX.				
9005 / 9006 / 9016	Finish - 9005 (Black), 9006 (Silver), 9016 (White)					XXXX.			
010 / 015 / 020 / 030 / 040 / 060 / 080 / H01 / V01 / H02 / V02 / H03 / V03	Beam angle - 10° (native) / 15° / 20° / 30° / 40° / 60° / 80° / H01 (10x60°) / V01 (60x10°) / H02 (15x60°) / V02 (60x15°) / H03 (30x60°) / V03 (60x30°)						XXX.		
not applicable								XX.	
not applicable									XX

Example : Fira Pro, RDM, VC 5700K, Silver, 40° = **FIRA104.RDM2.VC.9006.040.XX.XX**

FIRA OPTICAL CONTROL ACCESSORIES - PART NUMBERS

### PART NUMBER STRUCTURE

OPTIONS	DESCRIPTION	FIRA	XXX.	XXXX.	XX.	XXXX.	XXX.	XX.	XX
FIRA	Fira accessory	FIRA							
104 / 109	Luminaire size - 104 (Pro), 109 (Ultra)		XXX.						
A001 / A002 / A003	Beam Shaper - A001 Louvre, A002 Snoot, A003 Half Snoot			XXXX.					
not applicable					XX.				
9005 / 9006 / 9016	Finish - 9005 (Black), 9006 (Silver), 9016 (White)					XXXX.			
not applicable							XXX.		
not applicable								XX.	
not applicable									XX

Example : Fira Pro Louvre Black = **FIRA104.A001.XX.9005.XXX.XX.XX**


INSTALLATION ACCESSORIES

Description	Part Number
QuickLINK+ cable 1m - bare ends	LUXIHWX.XL01.XX.NONE.XXX.XX.XX
QuickLINK+ cable 2m - bare ends	LUXIHWX.XL02.XX.NONE.XXX.XX.XX
QuickLINK+ cable 5m - bare ends	LUXIHWX.XL05.XX.NONE.XXX.XX.XX
LuxCONNECT box IP66 - With 1 - QuickLINK+ (F) 1m cable, for hardwired installation (supplied with cable glands)	LUXIHWX.WB01.XX.NONE.XXX.XX.XX
LuxCONNECT box IP66 - With 2 - QuickLINK+ (F) 1m cables, for hardwired installation (supplied with cable glands)	LUXIHWX.WB03.XX.NONE.XXX.XX.XX
LuxCONNECT Wireless connection box IP66 - With 1 - QuickLINK+ (F) 1m cable, for hardwired installation (supplied with cable glands)	LUXIHWX.LCW01.XX.NONE.XXX.XX.XX
LuxCONNECT Wireless connection box IP66 - Prewired with 2 - QuickLINK+ (F) 1m cable, 1 - for hardwired installation (supplied with cable glands)	LUXIQLX.LCW03.XX.NONE.XXX.XX.XX
Mounting plate accessory (black)	FIRAM01.F001.XX.9005.XXX.XX.XX
Mounting plate accessory (silver)	FIRAM01.F001.XX.9006.XXX.XX.XX
Mounting plate accessory (white)	FIRAM01.F001.XX.9016.XXX.XX.XX


## Fira Pro Flood VIVID COLOUR & TUNABLE WHITE

COMPACT LED FLOOD FOR ARCHITECTURAL LIGHTING

PRODUCT DRAWINGS (All dimensions in mm)

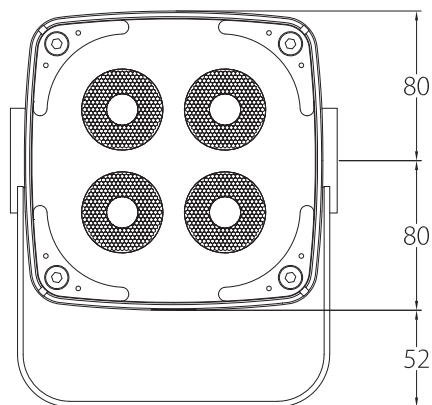



Rear view

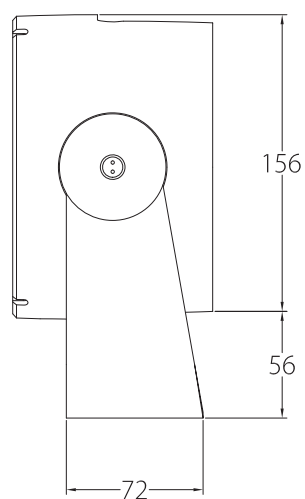

Perspective view



Top view

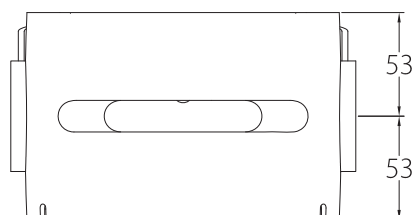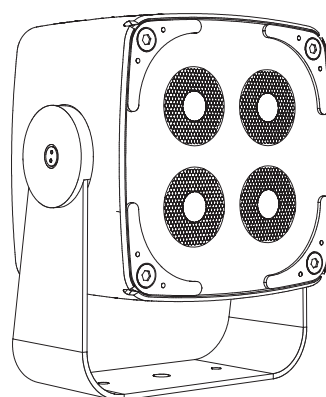

### Weights

Fira Pro Flood 4.4 kgs (9.7lbs)

### Dimensions


212mm (H) x 175mm (W) x 106mm (D)




## Fira Pro Flood VIVID COLOUR & TUNABLE WHITE

COMPACT LED FLOOD FOR ARCHITECTURAL LIGHTING

### PRODUCT DRAWINGS




Top view

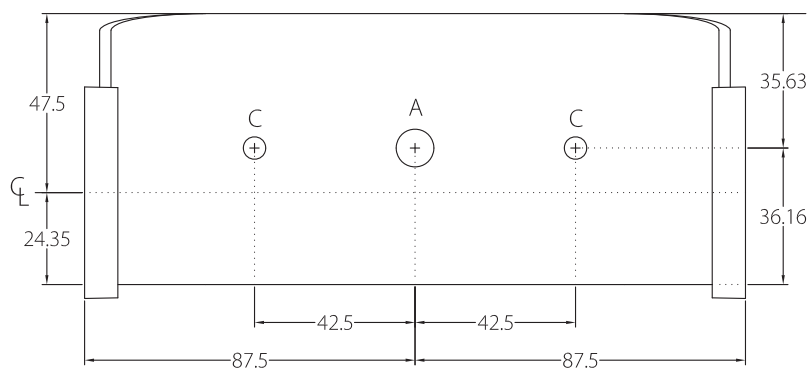


### Optional Mounting Plate


An optional mounting plate is available, to fit the Fira Pro & Fira Ultra

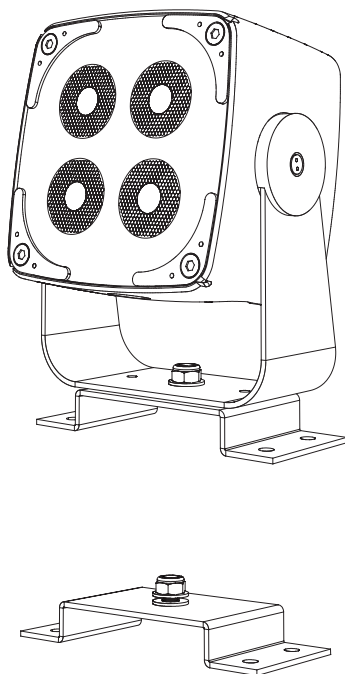

Top view

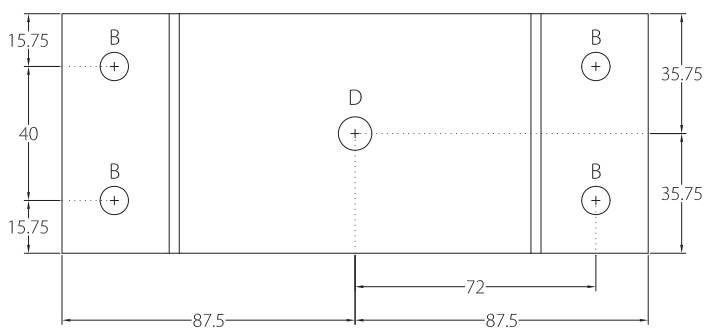

Side view

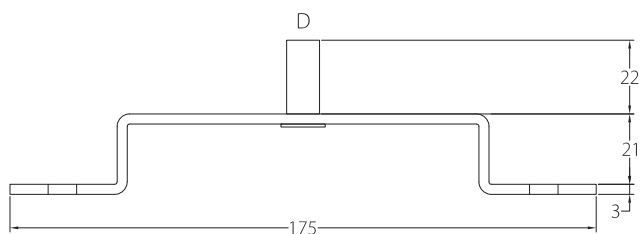

### Hole details

- (A) - Clearance for M10 fixings
- (B) - Clearance for M8 fixings
- (C) - Clearance for M6 fixings
- (D) - M10 Stud for Standard Yoke

All dimensions in mm

### PULSAR


by DW Windsor Ltd, Pindar Road, Hoddesdon, Hertfordshire, EN11 0DX, UK  
[www.dwwindsor.com/pulsar](http://www.dwwindsor.com/pulsar) | [info@dwwindsor.com](mailto:info@dwwindsor.com) | +44 (0)1992 474600

## Fira Pro Flood VIVID COLOUR & TUNABLE WHITE


COMPACT LED FLOOD FOR ARCHITECTURAL LIGHTING

### PRODUCT DRAWINGS

Fira Pro  
With optional Mounting Plate

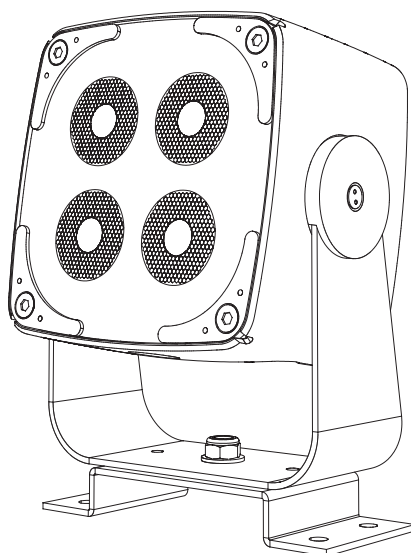

Fira Pro  
With optional Mounting Plate  
and 50mm Snoot

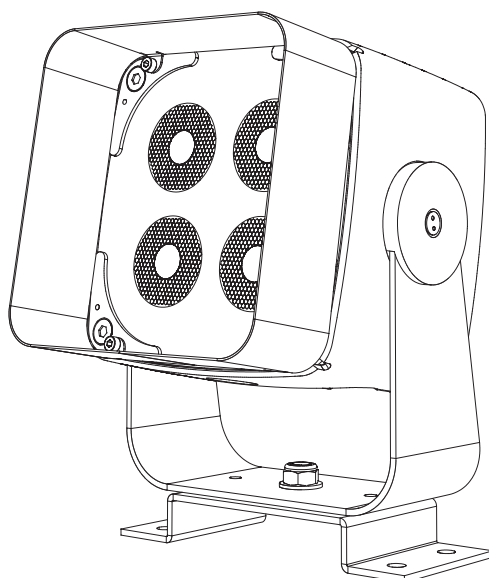


## Fira Pro Flood VIVID COLOUR & TUNABLE WHITE

COMPACT LED FLOOD FOR ARCHITECTURAL LIGHTING

### PRODUCT DRAWINGS


Fira Pro

With optional Mounting Plate  
and Half Snoot

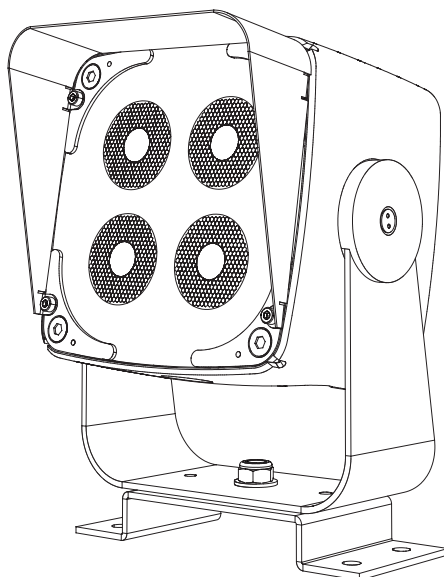

Fira Pro

With optional Mounting Plate  
and Louvre

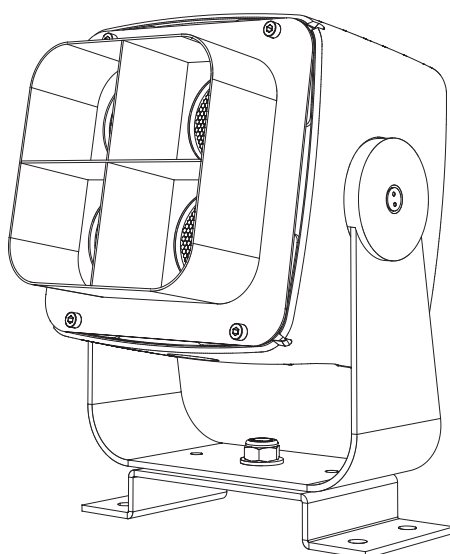















## Fira Pro Flood VIVID COLOUR & TUNABLE WHITE

COMPACT LED FLOOD FOR ARCHITECTURAL LIGHTING

### ADDITIONAL INFORMATION

#### Key Feature Icons

 IP66	Ingress Protection Value	 IK09	Mechanical Impact Protection IK Value	 +50°C -20°C	Operating Temperature Range		Corrosion Resistant
 WARRANTY 5YRS	Warranty Period	 120-277 VAC	Operating Voltage Range	 INTERBIT SMOOTHING	Smooth Interbit Theatrical Dimming	 FLICKER FREE	True Flicker Free Output
 CRI 90+	Colour Rendering Index Value	 SINGLE BIN	Single Bin LED Selection	 DMX	DMX 512 Control	 RDM	RDM Compliant
 LUX RAMP	LuxRamp For Maximum Output		Homogeneous Colour Mixing				

#### Cabling

##### Mains Supply Cable Colours (Harmonised)

Green/Yellow	Earth - Ground
Brown	Live Phase
Blue	Neutral

##### DMX Cable Colours (Pulsar)

White	DMX +
Blue	DMX -
Shield	Screen

##### QuickLINK+ Cable Colours (Power)

Green	Earth - Ground
Black	Live Phase
White	Neutral

##### QuickLINK+ Cable Colours (Data in)

White	DMX +
Green	DMX -
Shield	Screen

##### QuickLINK+ Cable Colours (Data through)

Red	DMX +
Blue	DMX -
Shield	Screen

#### Portable Appliance Testing

Fira Pro luminaires may be safely earth bond and insulation tested (500V).

#### Standards

Fira Pro luminaires comply with the following international and national harmonised standards.

Electrical Safety - EN 60598, EN 60598-2-13, EN 61347

EMC - EN 55015, EN 61547

RoHS - EN 50581

Photobiological – EN 62471

WEEE - EN 50419

Protection – IP66 / IK9

#### Warranty

Five years from the date of original purchase.

The warranty covers defects in manufacturing workmanship and materials. It is limited to parts and labour.

The warranty becomes void if the product is :-

- A Misused.
- B Not used in accordance with the instructions.
- C The cable connections are not made according to our instructions if the unit is used in damp or wet environments.
- D Repairs are made by unauthorised persons.
- E The serial number label has been removed or defaced.

Pulsar's maximum liability shall not exceed the price paid for the product.

In the unlikely event of a fault occurring, do not use without repair, return the product, with a description of the fault, to your supplier or direct to Pulsar for immediate attention.

Full warranty details are available on request or from our website at [www.pulsarlight.com](http://www.pulsarlight.com).

As part of our commitment to continuous improvement PULSAR may change the specifications of its products without prior notification or public announcement.

All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract.

Please visit our website for the most up to date information.