

Installation Instructions



IP66

IK09

230VAC 50Hz



IMPORTANT



- Disconnect electrical supply before installation or servicing.
- This product must be earthed.
- This product is designed to operate outdoors.
- Do not stare at operating light source.
- Personnel to wear protective safety glass compliant with EN166 1F/EN169-5 when commissioning or maintaining this luminaire.
- LEDs contained within this luminaire shall only be replaced by the manufacturer, their service agent or similar qualified person.



PRODUCT DETAILS

	FIRA
Dimensions (mm)	212 (H) x 175 (W) x 106 (D)
Weight (kg)	4.5

UNIT: mm

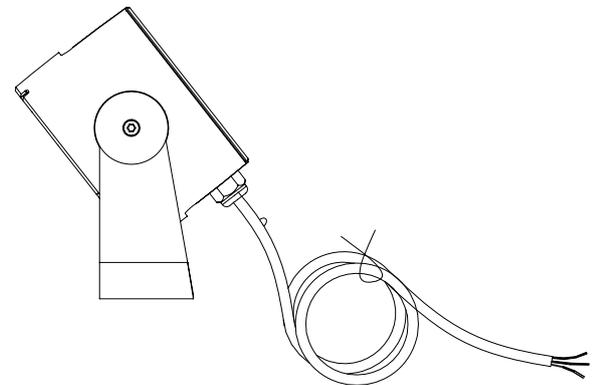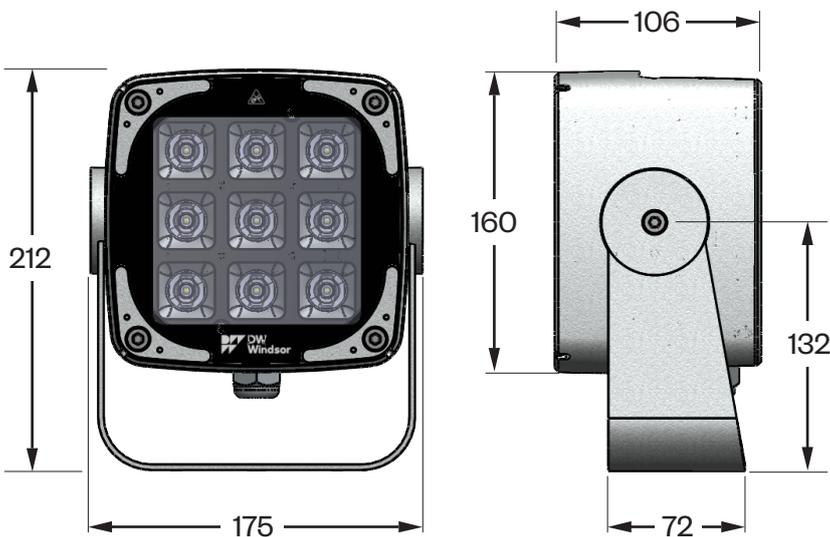

1.5mm² 3-core cable (on/off version)
 1.5mm² 5-core cable (DALI version)
 All supplied pre-cabled

TOOLS REQUIRED




T20

DOWNLOAD THE APP


For direct wireless control on
 Bluetooth-enabled versions of Fira




Stirrup mounting

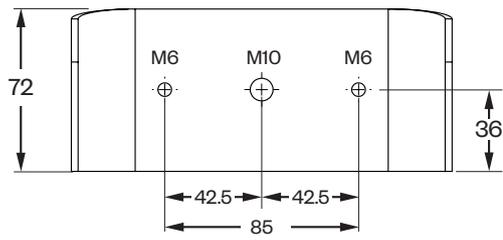

Optional surface mounting bracket

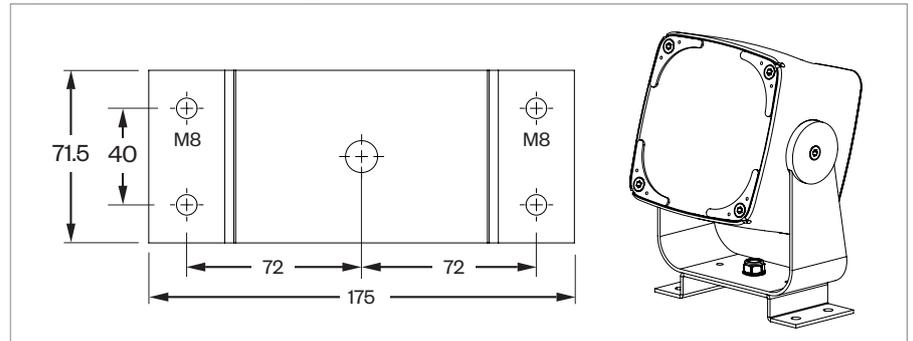


Tilt adjustment

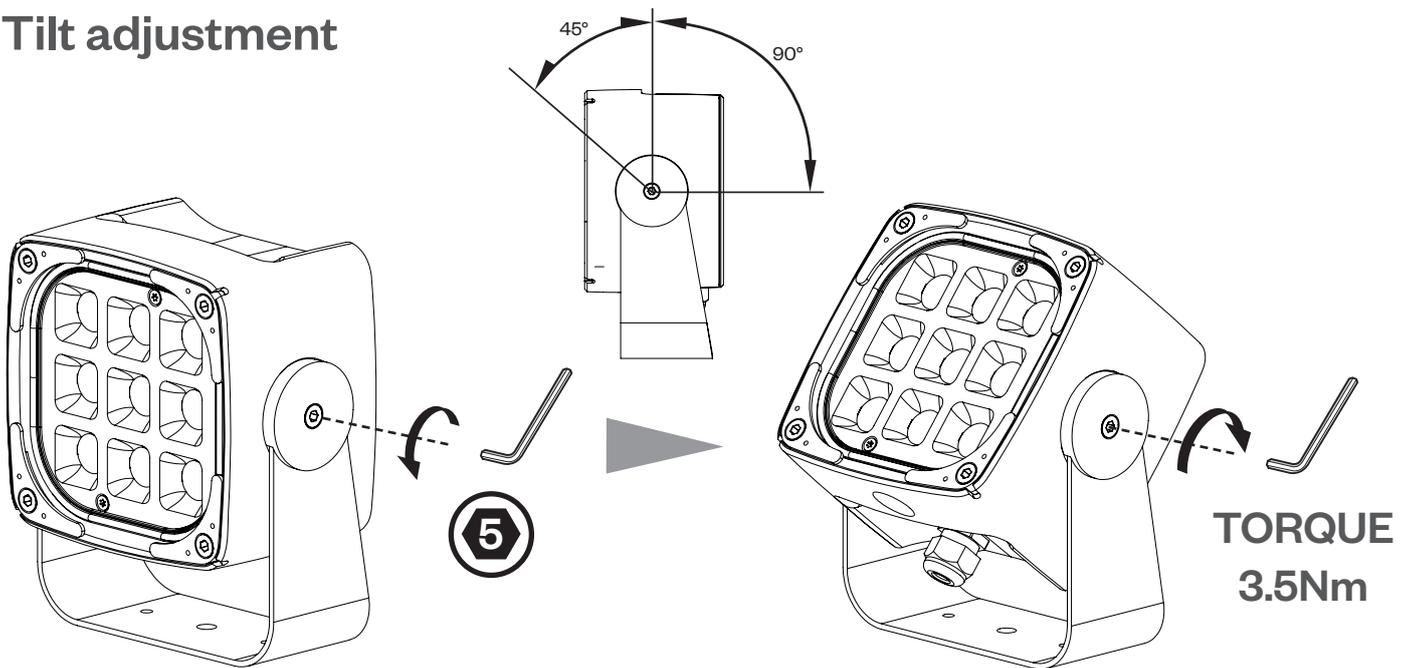


Accessories


All attachments are fixed using 4 x M3 Torx taptite screws

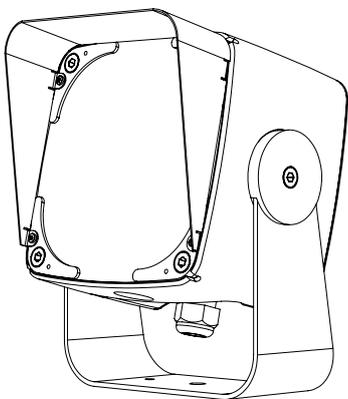

Half snoot

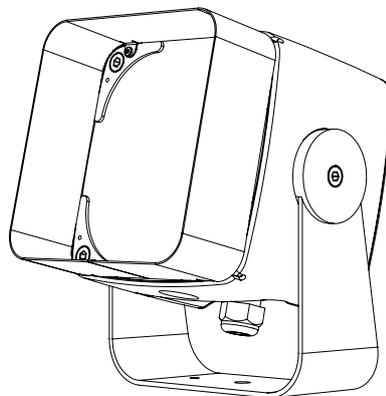

Snoot (50mm deep)

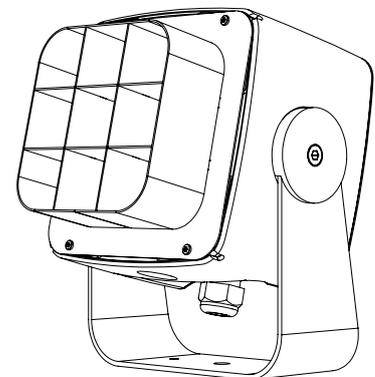

Louvre