

Our performance solution, Garda Pro is designed for schemes that require increased module spacings or higher light levels and uniformity. Garda Pro distributes light over a wider area, making it ideally suited to single-sided schemes.

Typical applications: overpasses, ramps & walkways, footpaths.


Performance

	3000K	4000K
120mm	122lm	131lm
300mm	449lm	489lm
600mm	894lm	972lm
900mm	1349lm	1467lm
1200mm	1800lm	1956lm

Mechanical

Housing	Stainless steel Aluminium
Glazing	Polycarbonate
Colours	Brushed stainless steel Powder coated aluminium (Other RAL colours on request)
IP Rating	IP66
IK Rating	IK10

Asymmetric Module

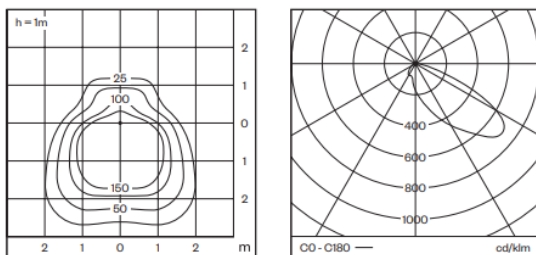

Electrical

	48V AC	48V DC	24V AC	24V DC
120mm	-	1.5W	-	1.5W
300mm	-	4.4W	-	4.4W
600mm	-	8.8W	-	8.8W
900mm	-	13.2W	-	13.2W
1200mm	-	17.6W	-	17.6W

Class	Class III
Control	Variable resistance dimming 1-10V DALI DMX (via DALI converter)
Lifetime	100,000 hours
Certifications	UKCA, CE