


Product Name	Kirium Wall
Mounting Options	Wall mount (option to mount over BESA box available)
Output	up to 5,500lm
Light Source	LED
Colour Temp	2700K / 3000K / 4000K / 4000K (SUNLIKE) >70 (3000K / 4000K)
CRI	>80 (2700K) >95 (4000K SUNLIKE)
Distribution	Narrow (Diamond+ A1) / Medium (Diamond+ A5) / Wide (Diamond+ C2)
Number of LEDs	16
Power	12-37W
Luminaire Efficacy (max)	up to 122lm/W
Electrical Class	Class I (II on request)
Operating Voltage	220-240V
Driver	DALI / 1-10V (fully programmable with Constant Light Output enabled)
Drive Current Range	300 to 1000mA
Lifetime	100,000 hours (L80 B10)
Operating Temperature	-25°C to +40°C
IP Rating	IP66
IK Rating	IK10
Colour Finish	Mid Grey RAL 7046 / Light Grey RAL 7035 / Black RAL 9005 / White RAL 9016 / Aluminium 9006 / Metallic Grey 9007 / Metallic Dark Grey DB703 / Corten Brown (other RAL colours on request)
Housing Material	High pressure die-cast LM6 aluminium
Finish	Polyester powder coat
Glazing Material	Clear / Frosted polycarbonate
Weight	3.5kg
Certifications	CE
Control Options	Photocell / Part night switching / Pre-programmed dimming / Integral CMS / Presence detector / Integral 3 hour emergency

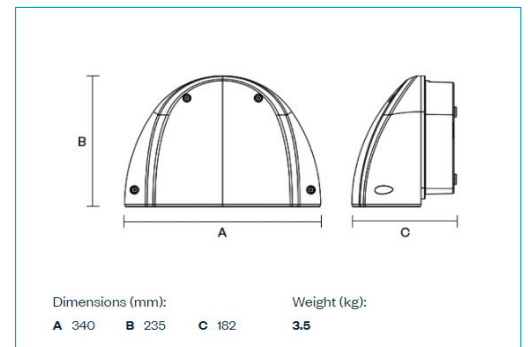

Additional Information