

# LADOR



Square surface ceiling-mounted architectural range. Four sizes of square artistic precision with wide range of beam distributions.


## Luminaire structure

- Die-cast aluminium housing pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 316
- High-efficiency PMMA lens
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear


## Feature



## Light symbol

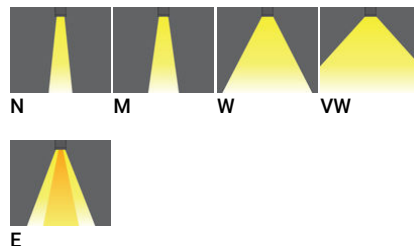

## Product color

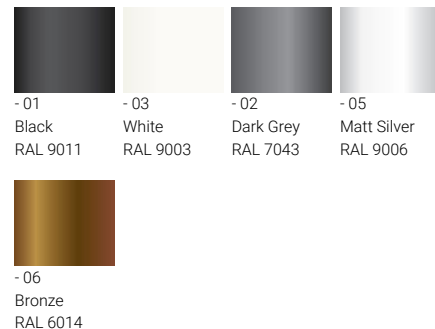

We reserve the right to make technical and design changes.

06:25, 16-01-2020

<https://www.ligman.com/lador-surface-exterior-downlights-la-ce3/>



**EUROPE**  
LIGMAN EUROPE s.r.o.  
VGP Park Ústí nad Labem  
P 2 120  
40317, Přestanov  
Czech Republic  
+420 477 071 500  
[sales.cz@ligman.com](mailto:sales.cz@ligman.com)

**ASIA PACIFIC**  
LIGMAN Lighting Co.,Ltd.  
17/2 Moo4 Monthong  
Bangnampreaw  
24150, Chachoengsao  
Thailand  
+66 2 108 6700  
[info@ligman.com](mailto:info@ligman.com)



# LADOR

## Technical information



	Model number	Lamp	Power	Lumen	Optic	CCT	Dimming Type	Weight
LADOR 9	<b>LD-80001</b>	1 LED	3 W	149 - 222 lm	N [10°, M [19°, W [33°, VW [71°, E [41°x14°]	4000K, 3000K	On/Off	0.7 kg
LADOR 10	<b>LD-80011</b>	4 LED	11 W	686 - 904 lm	N [10°, M [19°, W [33°, VW [71°, E [41°x14°]	3000K, 4000K	On/Off	1.1 kg
LADOR 11	<b>LD-80021</b>	9 LED	21 W	1542 - 1975 lm	N [10°, M [19°, W [33°, VW [71°, E [41°x14°]	4000K, 3000K	On/Off, DALI	2.1 kg
LADOR 12	<b>LD-80031</b>	16 LED	39 W	2815 - 3568 lm	N [10°, M [19°, W [33°, VW [71°, E [41°x14°]	3000K, 4000K	On/Off, 1-10V, DALI	2.9 kg





Mounting detail

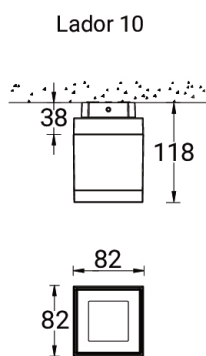

Mounting detail

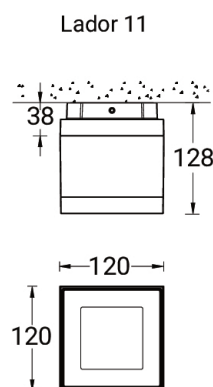

Mounting detail

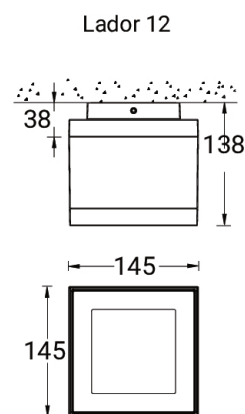

Mounting detail