

**LIGHTALK 1 (LA-60002)**




**Luminaire structure**


- Die-cast aluminium end-caps and extruded aluminium housing pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame
- Single cable entry
- Through wiring on request
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened 8 mm thick glass
- Integral control gear
- Recessing box is not included
- Suitable for walk-over with a maximum load of 500 kg



Lightalk 1

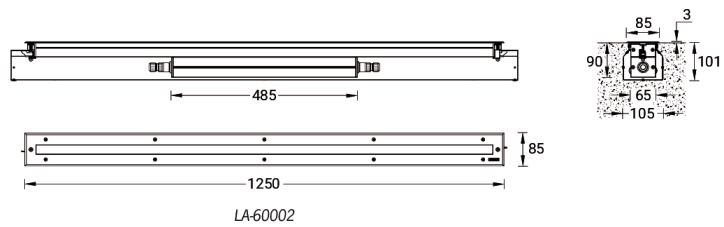


**Light symbol**

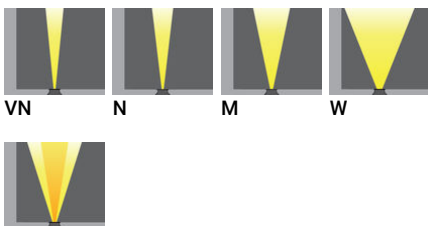

**E**  
**Technical information**

Lamp	36 LED
Lamp type	LED
Dimming type	On/Off, 1-10V, DALI
EEC	A+
Material	Stainless Steel
Weight	7.8 kg

**Product color**



**Product description**

Without recessing box - 1250 mm

<b>Luminaire</b>	
Power	57 W
Lumen	3908 - 5703 lm
Efficacy	69 - 100 lm/W
CCT	3000K, 4000K
Drive current	500 mA
Optic	VN [12°], N [14°], M [24°], W [42°], E [18° x35°]

We reserve the right to make technical and design changes.

05:44, 29-01-2020

<https://www.ligman.com/lightalk-1-la-60002/>

**EUROPE**  
LIGMAN EUROPE s.r.o.  
VGP Park Ústí nad Labem  
P 2 120  
40317, Přestanov  
Czech Republic  
+420 477 071 500  
[sales.cz@ligman.com](mailto:sales.cz@ligman.com)

**ASIA PACIFIC**  
LIGMAN Lighting Co.,Ltd.  
17/2 Moo4 Monthong  
Bangnampreaw  
24150, Chachoengsao  
Thailand  
+66 2 108 6700  
[info@ligman.com](mailto:info@ligman.com)

**LIGHTALK 1** (LA-60002)**Accessories**

---



---

Recessing box  
**A61051**

---



---

Connector IP68  
**A62591**

---

**LIGHTALK 1 (LA-60002)**

Variant reference	Variant name	Lumen (Luminaire)
LA-60002-VN-W30-ND	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 12° - 3000K - On/Off - Stainless Steel	4517 lm
LA-60002-VN-W30-DI	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 12° - 3000K - 1-10V - Stainless Steel	4517 lm
LA-60002-VN-W30-DA	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 12° - 3000K - DALI - Stainless Steel	4517 lm
LA-60002-VN-W40-ND	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 12° - 4000K - On/Off - Stainless Steel	5232 lm
LA-60002-VN-W40-DI	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 12° - 4000K - 1-10V - Stainless Steel	5232 lm
LA-60002-VN-W40-DA	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 12° - 4000K - DALI - Stainless Steel	5232 lm
LA-60002-N-W30-ND	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 14° - 3000K - On/Off - Stainless Steel	3908 lm
LA-60002-N-W30-DI	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 14° - 3000K - 1-10V - Stainless Steel	3908 lm
LA-60002-N-W30-DA	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 14° - 3000K - DALI - Stainless Steel	3908 lm
LA-60002-N-W40-ND	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 14° - 4000K - On/Off - Stainless Steel	4624 lm
LA-60002-N-W40-DI	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 14° - 4000K - 1-10V - Stainless Steel	4624 lm
LA-60002-N-W40-DA	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 14° - 4000K - DALI - Stainless Steel	4624 lm
LA-60002-M-W30-ND	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 24° - 3000K - On/Off - Stainless Steel	4846 lm
LA-60002-M-W30-DI	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 24° - 3000K - 1-10V - Stainless Steel	4846 lm
LA-60002-M-W30-DA	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 24° - 3000K - DALI - Stainless Steel	4846 lm
LA-60002-M-W40-ND	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 24° - 4000K - On/Off - Stainless Steel	5703 lm
LA-60002-M-W40-DI	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 24° - 4000K - 1-10V - Stainless Steel	5703 lm
LA-60002-M-W40-DA	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 24° - 4000K - DALI - Stainless Steel	5703 lm
LA-60002-W-W30-ND	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 42° - 3000K - On/Off - Stainless Steel	3949 lm
LA-60002-W-W30-DI	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 42° - 3000K - 1-10V - Stainless Steel	3949 lm
LA-60002-W-W30-DA	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 42° - 3000K - DALI - Stainless Steel	3949 lm
LA-60002-W-W40-ND	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 42° - 4000K - On/Off - Stainless Steel	4547 lm
LA-60002-W-W40-DI	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 42° - 4000K - 1-10V - Stainless Steel	4547 lm
LA-60002-W-W40-DA	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 42° - 4000K - DALI - Stainless Steel	4547 lm
LA-60002-E-W30-ND	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 18° x35° - 3000K - On/Off - Stainless Steel	4488 lm
LA-60002-E-W30-DI	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 18° x35° - 3000K - 1-10V - Stainless Steel	4488 lm
LA-60002-E-W30-DA	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 18° x35° - 3000K - DALI - Stainless Steel	4488 lm
LA-60002-E-W40-ND	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 18° x35° - 4000K - On/Off - Stainless Steel	5182 lm
LA-60002-E-W40-DI	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 18° x35° - 4000K - 1-10V - Stainless Steel	5182 lm
LA-60002-E-W40-DA	LIGHTALK 1 - LA-60002 - 36 LED - 57 W - 18° x35° - 4000K - DALI - Stainless Steel	5182 lm

We reserve the right to make technical and design changes.

05:44, 29-01-2020

<https://www.ligman.com/lightalk-1-la-60002/>

**EUROPE**

LIGMAN EUROPE s.r.o.  
 VGP Park Ústí nad Labem  
 P 2 120  
 40317, Přestanov  
 Czech Republic  
 +420 477 071 500  
[sales.cz@ligman.com](mailto:sales.cz@ligman.com)

**ASIA PACIFIC**

LIGMAN Lighting Co.,Ltd.  
 17/2 Moo4 Monthong  
 Bangnampreaw  
 24150, Chachoengsao  
 Thailand  
 +66 2 108 6700  
[info@ligman.com](mailto:info@ligman.com)