

LIGHTALK 1 (LA-60001)




Luminaire structure


- Die-cast aluminium end-caps and extruded aluminium housing pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame
- Single cable entry
- Through wiring on request
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened 8 mm thick glass
- Integral control gear
- Recessing box is not included
- Suitable for walk-over with a maximum load of 500 kg



Lighttalk 1

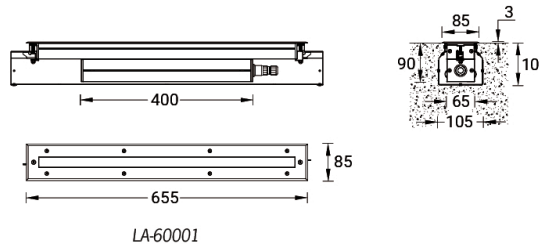


Light symbol



W

Product color



- 00
Stainless Steel

Product description

Without recessing box - 655 mm

Technical information

Lamp	18 LED
Lamp type	LED
Dimming type	DALI, 1-10V, On/Off
EEC	A+
Material	Stainless Steel
Weight	4.6 kg

Luminaire	
Power	28 W
Lumen	1943 - 2847 lm
Efficacy	69 - 102 lm/W
CCT	3000K, 4000K
Drive current	500 mA
Optic	E [18° x35°], M [24°], N [14°], VN [12°], W [44°]

We reserve the right to make technical and design changes.

05:43, 29-01-2020

<https://www.ligman.com/lighttalk-1-la-60001/>

EUROPE
LIGMAN EUROPE s.r.o.
VGP Park Ústí nad Labem
P 2 120
40317, Přestanov
Czech Republic
+420 477 071 500
sales.cz@ligman.com

ASIA PACIFIC
LIGMAN Lighting Co.,Ltd.
17/2 Moo4 Monthong
Bangnampreaw
24150, Chachoengsao
Thailand
+66 2 108 6700
info@ligman.com

LIGHTALK 1 (LA-60001)**Accessories**



Recessing box
A60951



Connector IP68
A62591

LIGHTALK 1 (LA-60001)

Variant reference	Variant name	Lumen (Luminaire)
LA-60001-E-W30-DA	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 18° x35° - 3000K - DALI - Stainless Steel	2244 lm
LA-60001-E-W30-DI	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 18° x35° - 3000K - 1-10V - Stainless Steel	2244 lm
LA-60001-E-W30-ND	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 18° x35° - 3000K - On/Off - Stainless Steel	2244 lm
LA-60001-E-W40-DA	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 18° x35° - 4000K - DALI - Stainless Steel	2631 lm
LA-60001-E-W40-DI	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 18° x35° - 4000K - 1-10V - Stainless Steel	2631 lm
LA-60001-E-W40-ND	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 18° x35° - 4000K - On/Off - Stainless Steel	2631 lm
LA-60001-M-W30-DA	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 24° - 3000K - DALI - Stainless Steel	2428 lm
LA-60001-M-W30-DI	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 24° - 3000K - 1-10V - Stainless Steel	2428 lm
LA-60001-M-W30-ND	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 24° - 3000K - On/Off - Stainless Steel	2428 lm
LA-60001-M-W40-DA	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 24° - 4000K - DALI - Stainless Steel	2847 lm
LA-60001-M-W40-DI	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 24° - 4000K - 1-10V - Stainless Steel	2847 lm
LA-60001-M-W40-ND	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 24° - 4000K - On/Off - Stainless Steel	2847 lm
LA-60001-N-W30-DA	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 14° - 3000K - DALI - Stainless Steel	1943 lm
LA-60001-N-W30-DI	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 14° - 3000K - 1-10V - Stainless Steel	1943 lm
LA-60001-N-W30-ND	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 14° - 3000K - On/Off - Stainless Steel	1943 lm
LA-60001-N-W40-DA	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 14° - 4000K - DALI - Stainless Steel	2279 lm
LA-60001-N-W40-DI	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 14° - 4000K - 1-10V - Stainless Steel	2279 lm
LA-60001-N-W40-ND	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 14° - 4000K - On/Off - Stainless Steel	2279 lm
LA-60001-VN-W30-DA	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 12° - 3000K - DALI - Stainless Steel	2258 lm
LA-60001-VN-W30-DI	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 12° - 3000K - 1-10V - Stainless Steel	2258 lm
LA-60001-VN-W30-ND	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 12° - 3000K - On/Off - Stainless Steel	2258 lm
LA-60001-VN-W40-DA	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 12° - 4000K - DALI - Stainless Steel	2648 lm
LA-60001-VN-W40-DI	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 12° - 4000K - 1-10V - Stainless Steel	2648 lm
LA-60001-VN-W40-ND	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 12° - 4000K - On/Off - Stainless Steel	2648 lm
LA-60001-W-W30-DA	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 44° - 3000K - DALI - Stainless Steel	1974 lm
LA-60001-W-W30-DI	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 44° - 3000K - 1-10V - Stainless Steel	1974 lm
LA-60001-W-W30-ND	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 44° - 3000K - On/Off - Stainless Steel	1974 lm
LA-60001-W-W40-DA	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 44° - 4000K - DALI - Stainless Steel	2315 lm
LA-60001-W-W40-DI	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 44° - 4000K - 1-10V - Stainless Steel	2315 lm
LA-60001-W-W40-ND	LIGHTALK 1 - LA-60001 - 18 LED - 28 W - 44° - 4000K - On/Off - Stainless Steel	2315 lm

We reserve the right to make technical and design changes.

05:43, 29-01-2020

<https://www.ligman.com/lightalk-1-la-60001/>

EUROPE

LIGMAN EUROPE s.r.o.
 VGP Park Ústí nad Labem
 P 2 120
 40317, Přestanov
 Czech Republic
 +420 477 071 500
sales.cz@ligman.com

ASIA PACIFIC

LIGMAN Lighting Co.,Ltd.
 17/2 Moo4 Monthong
 Bangnampreaw
 24150, Chachoengsao
 Thailand
 +66 2 108 6700
info@ligman.com