


MASK



Walk & drive-over semi-recessed in-ground marker lights. Tough, clean-aesthetics, with multiple light-emission directions.

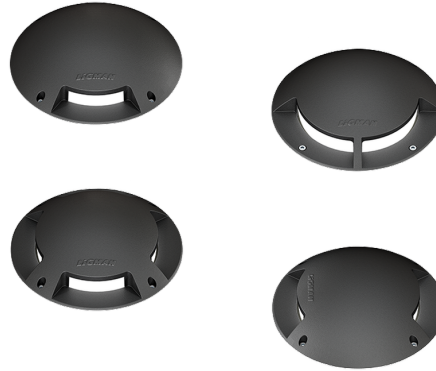

Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- One cable gland supplied with 1 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)


- Durable silicone rubber gasket
- High-efficiency glass lens
- Integral control gear
- Recessing box in high-density polyethylene is included
- To ensure efficient drainage, gravel must be used to a depth of 450 mm and width of 300 mm beneath the housing and should also be placed around luminaire

- Suitable for drive-over with a maximum load of 4,000 kg for MK-60249, MK-60259, 2,000 kg for MK-60269, 1,000 kg for MK-60729
- Vehicles with pneumatic tires can drive over the luminaire but the speed must not exceed 10 km/h
- Load is transferred by the housing to the foundation


Feature




Light symbol

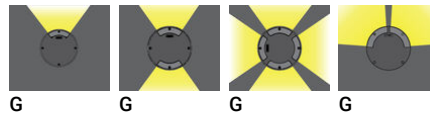

Product colour

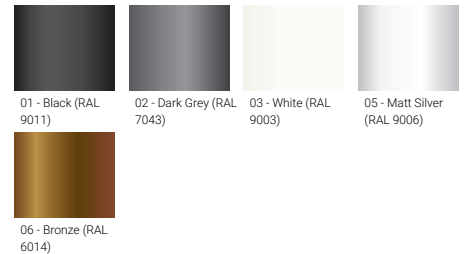

Special finishes upon request

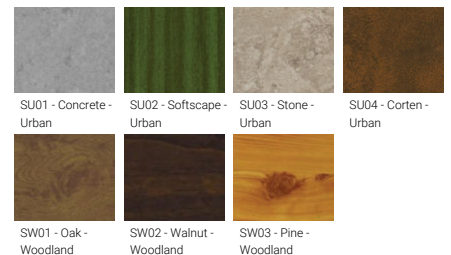




MASK

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
With recessing box / driver - Optic 90°x90°								
MASK 2	MK-60259	2 COB	8 W	202 - 220 lm	G [90° / 90°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	4.5 kg
With recessing box / driver - Optic 180°								
MASK 4	MK-60729	2 COB	8 W	207 - 223 lm	G [180°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	4.4 kg
With recessing box / driver - Optic 360°								
MASK 3	MK-60269	4 COB	15 W	402 - 433 lm	G [360°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	4.4 kg
With recessing box / driver - Optic 90°								
MASK 1	MK-60249	1 COB	4 W	104 - 112 lm	G [90°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	4.4 kg

Accessories

	 Connector IP68 - 5 Pin for DI/DA A613191	 Connector IP68 - 3 Pin for ND A62591	 DALI Control System Control-DALI
MK-60249	•	•	•
MK-60259	•	•	•
MK-60269	•	•	•
MK-60729	•	•	•

MASK**MASK**