


NIKON




Ceiling-recessed exterior downlights.
Modern, clean and powerful down lighting family provided the best resilient under-canopy solutions in the marketplace.




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- 6 mm thick front ring in stainless steel or aluminium
- Single cable entry
- One cable gland supplied with 1.5 m of 3x1.0 sqmm outdoor cable for NI-80042, NI-80122
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear for NIKON 5, NIKON 6
- Remote driver is included for NIKON 1, NIKON 2, NIKON 3, NIKON 4
- Remote box IP-rated is included for NIKON 1, NIKON 2, NIKON 3, NIKON 4


Feature

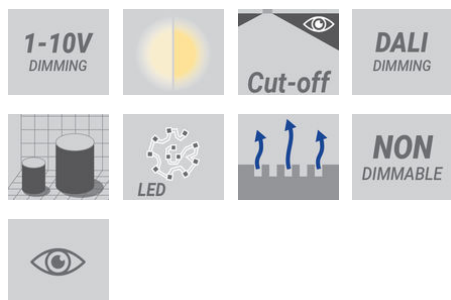

Light symbol

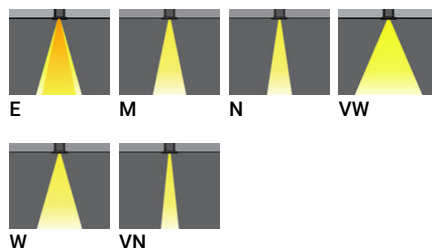

Product colour

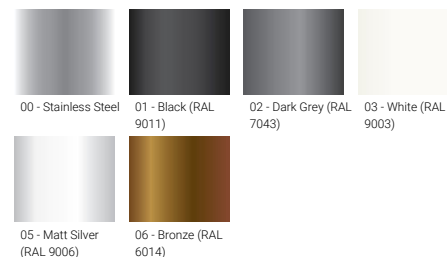

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
With driver - Round - Stainless steel frame									
NIKON 5	NI-80042-S	MR16-GU10	7.5 W	369 - 455 lm	E [10°x60°], M [25°], N [10°], VW [60°], W [36°]	3000K CRI80, 4000K CRI80	On/Off	0.6 kg	
With driver - Square - Aluminium frame									
NIKON 6	NI-80122-A	MR16-GU10	7.5 W	369 - 455 lm	E [10°x60°], M [25°], N [10°], VW [60°]	3000K CRI80, 4000K CRI80	On/Off	0.5 kg	
With driver - Square - Stainless steel frame									
NIKON 6	NI-80122-S	MR16-GU10	7.5 W	369 - 455 lm	E [10°x60°], M [25°], N [10°], VW [60°], W [36°]	3000K CRI80, 4000K CRI80	On/Off	0.6 kg	
With driver- Round - Aluminium frame									
NIKON 5	NI-80042-A	MR16-GU10	7.5 W	369 - 455 lm	E [10°x60°], M [25°], N [10°], VW [60°]	3000K CRI80, 4000K CRI80	On/Off	0.5 kg	
With remote driver / remote IP box - Square - Stainless steel frame									
NIKON 4	NI-80533-S	24 LED	39 W	3794 - 4303 lm	M [26°], N [15°], W [45°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	2.8 kg	
With remote driver / remote IP box - Round - Aluminium frame									
NIKON 1	NI-80501-A	7 LED	13 W	888 - 1045 lm	M [28°], N [18°], W [39°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	0.5 kg	
NIKON 1	NI-80503-A	1 LED	11 W	640 - 753 lm	VN [8°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	0.5 kg	
NIKON 3	NI-80521-A	18 LED	29 W	2689 - 3144 lm	M [27°], N [15°], W [44°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	2.3 kg	
NIKON 3	NI-80523-A	24 LED	39 W	3794 - 4303 lm	M [26°], N [15°], W [45°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	2.3 kg	
NIKON 3	NI-80525-A	7 LED	33 W	3091 - 3320 lm	VN [8°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	2.3 kg	
With remote driver / remote IP box - Round - Stainless steel frame									
NIKON 1	NI-80501-S	7 LED	13 W	888 - 1045 lm	M [28°], N [18°], W [39°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	0.7 kg	
NIKON 1	NI-80503-S	1 LED	11 W	640 - 753 lm	VN [8°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	0.7 kg	
NIKON 3	NI-80521-S	18 LED	29 W	2689 - 3144 lm	M [27°], N [15°], W [44°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	2.6 kg	
NIKON 3	NI-80523-S	24 LED	39 W	3794 - 4303 lm	M [26°], N [15°], W [45°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	2.6 kg	
NIKON 3	NI-80525-S	7 LED	33 W	3091 - 3320 lm	VN [8°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	2.6 kg	
With remote driver / remote IP box - Square - Aluminium frame									
NIKON 2	NI-80511-A	7 LED	13 W	888 - 1045 lm	M [28°], N [18°], W [39°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	0.6 kg	
NIKON 2	NI-80513-A	1 LED	11 W	640 - 753 lm	VN [8°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	0.6 kg	
NIKON 4	NI-80531-A	18 LED	29 W	2689 - 3144 lm	M [27°], N [15°], W [44°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	2.5 kg	
NIKON 4	NI-80533-A	24 LED	39 W	3794 - 4303 lm	M [26°], N [15°], W [45°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	2.8 kg	
NIKON 4	NI-80535-A	7 LED	33 W	2841 - 3320 lm	VN [8°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	2.8 kg	
With remote driver / remote IP box - Square - Stainless steel frame									
NIKON 2	NI-80511-S	7 LED	13 W	888 - 1045 lm	M [28°], N [18°], W [39°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	0.8 kg	

We reserve the right to make technical and design changes.

01:12, 30-01-2023

<https://www.ligman.com/nikon-recessed-exterior-downlights-ni-ce3/>

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Preaw,
24150 Chachoengsao - Thailand
info@ligman.com

INDIA
LIGMAN India Illumination Systems Private Ltd.
D-35, EPIP Site V, Kasna Industrial Estate,
Gautam Budh Nagar, U.P. 201306 Greater Noida - India
sales.in@ligman.com

NIKON

NIKON 2	NI-80513-S	1 LED	11 W	640 - 753 lm	VN [8°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	0.8 kg	
NIKON 4	NI-80531-S	18 LED	29 W	2689 - 3144 lm	M [27°], N [15°], W [44°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	2.8 kg	
NIKON 4	NI-80535-S	7 LED	33 W	3091 - 3320 lm	VN [8°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	2.8 kg	

Accessories


	 Concrete box modification upon request CONCRETE- BOX	 DALI Control System Control-DALI
NI-80042-A	•	
NI-80042-S	•	
NI-80122-A	•	
NI-80122-S	•	
NI-80501-A	•	•
NI-80501-S	•	•
NI-80503-A	•	•
NI-80503-S	•	•
NI-80511-A	•	•
NI-80511-S	•	•
NI-80513-A	•	•
NI-80513-S	•	•
NI-80521-A	•	•
NI-80521-S	•	•
NI-80523-A	•	•
NI-80523-S	•	•
NI-80525-A	•	•
NI-80525-S	•	•
NI-80531-A	•	•
NI-80531-S	•	•
NI-80533-A	•	•
NI-80533-S	•	•
NI-80535-A	•	•
NI-80535-S	•	•

NIKON



NIKON




NIKON 1





NIKON 2

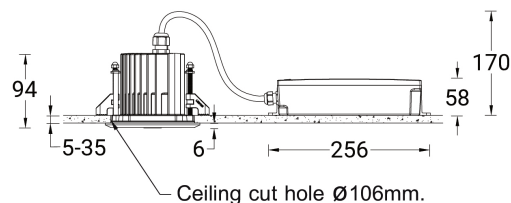


NIKON 3



NIKON 4

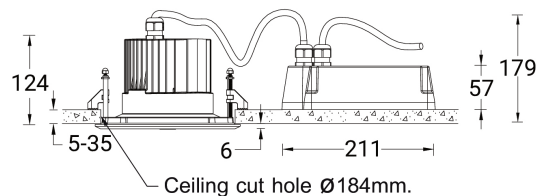

NIKON 5



NIKON 6

