



Peak

Contemporary
low-profile luminaire

Peak - direct post

IP66 | IK09 | CLASS II

Features:

Contemporary, low profile luminaire

Options

Peak 1 (one light engine) for mounting at 4-6 metres

Peak 2 (two light engines for mounting at 6-8 metres

Peak 3 (three light engines) for mounting at 8-10 metres

Light source

Philips Fortimo FastFlex LED Gen3

L80 lifetime prediction (ta 25° max.)

In excess of 80,000 hours (L80 B10)

Colour temperature

3000K (warm white)

4000K (neutral white)

Colour rendering index

>70Ra (typically 75Ra)

Drive current

200mA - 700mA

Glare rating:

G4

Mounting

Post top [60-76mm Ø]

Penetrated for through post mounting [60 / 76mm Ø]

Control

Switch only: miniature PEC / NEMA PEC / Part Night switch

Remote switch (PIR / solar timeclock etc.)

Dimming: Pre-programmed

CLO: Enabled as standard

CMS: Compatible with all available CMS systems

Colours

SW302G Graphite grey

MW300D Silver grey

SN351F Black



Other RAL colours on request

Materials

Body: High pressure die cast aluminium

Glazing: Toughened glass

Dimensions:

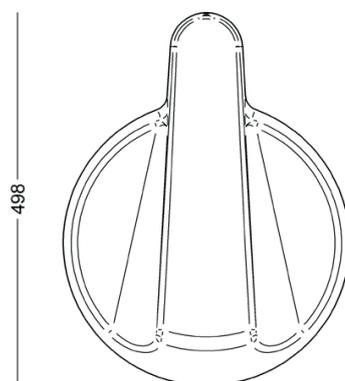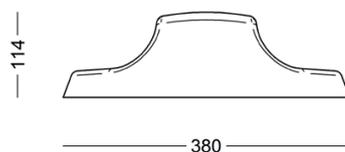

Weight

6-7kg (dependent on module quantity)

Windage

0.052m²

Peak - side entry

IP66 | IK09 | CLASS II

Features:

Contemporary, low profile luminaire

Options

Peak 1 (one light engine) for mounting at 4-6 metres

Peak 2 (two light engines for mounting at 6-8 metres

Peak 3 (three light engines) for mounting at 8-10 metres

Light source

Philips Fortimo FastFlex LED Gen3

L80 lifetime prediction (ta 25° max.)

In excess of 80,000 hours (L80 B10)

Colour temperature

3000K (warm white)

4000K (neutral white)

Colour rendering index

>70Ra (typically 75Ra)

Drive current

200mA - 700mA

Glare rating:

G4

Mounting

Side entry [42, 48, 60mm Ø]

Penetrated for through post mounting [60 / 76mm Ø]

Control

Switch only: miniature PEC / NEMA PEC / Part Night switch
Remote switch (PIR / solar timeclock etc.)

Dimming: Pre-programmed

CLO: Enabled as standard

CMS: Compatible with all available CMS systems

Colours

SW302G Graphite grey

MW300D Silver grey

SN351F Black



Other RAL colours on request

Materials

Body: High pressure die cast aluminium

Glazing: Toughened glass

Dimensions:

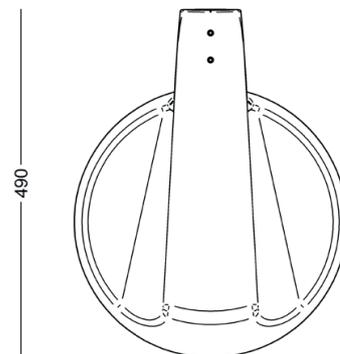

Weight

6-7kg (dependent on module quantity)

Windage

0.052m²


Peak Specification

Product code configurator

example: **PEA1DPU27**

Product range	
Peak	PEA
Number of Light Engines	
1	1
2	2
3	3
Entry	
Direct Post	DP
Penetrated Direct Post	PDP
Side Entry	SE
Control	
Photocell 35lux	U
NEMA (3pin)	?
Part night switch	PS
Pre-programmed dim	PD
CMS Harvard Leafnut	CH
CMS Mayflower	CM
CMS Telensa	CT
CMS Zodion Vizion	CZ
CMS Urban Control	C?
Colour	
RAL9007 Textured Metallic Silver	27
MW300D Silver Grey	??
RAL9005 Black	10

Dimensions

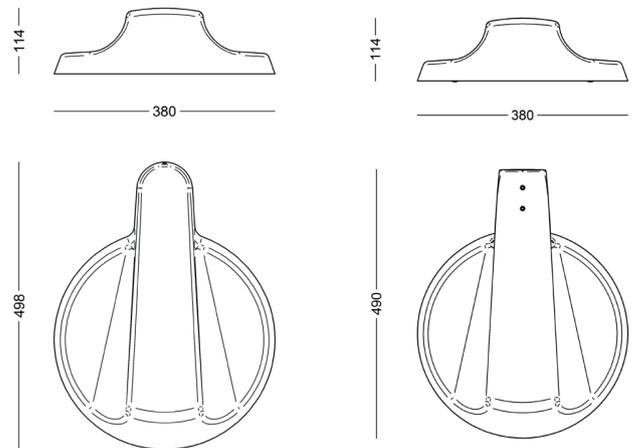

Weight

6-7kg (dependent on module quantity)

Windage

0.052 m²

Lumen Output:

Module qty	Lumens	Power	Efficacy
1	3800lm max.	39W max.	upto 120lm/W
2	7400lm max.	75W max.	upto 120lm/W
3	11000lm max.	113W max.	upto 120lm/W