



Colour: DB 703

Protector 180/600

Specifications

Completely cylindrical cast aluminium/galvanised steel bollard with a flat top.

Mounting

Removable with 3p-Technology, consisting of a ground shell, junction piece with integrated breaking point, two clamping bolts, a hex head bolt and a lock nut.

Alternative version available for embedding in concrete.

Illuminated bollard


Available in a complementary design for cohesive project design.

| | Galvanised steel | Cast aluminium |
|---------------|------------------------|------------------------|
| Fixed root | BO PR1 R 320 XXX XX 06 | BO PR1 R 020 XXX XX 06 |
| 3p-Technology | BO PR1 T 320 XXX XX 06 | BO PR1 T 020 XXX XX 06 |

Product codes for powder coated DB 703

Finish

1. Powder coating in RAL 3020, 6005, 6009, 7016, 7035, 9005, 9006, 9016 and DB 703 as standard.
2. Accessories and special requirements such as different colours, red and white paint, reflective film or powder coating of chains, rings, shackles, etc. are available to special order.

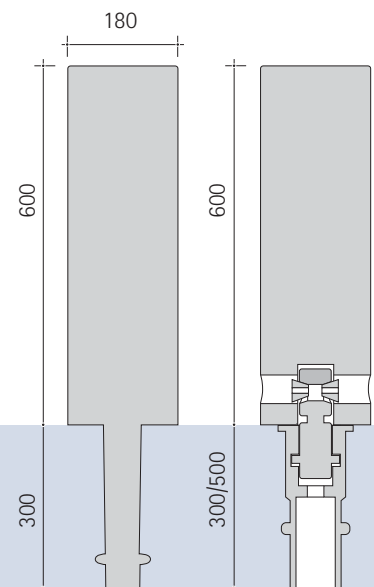

Measurements

Height above ground level: 600mm

Diameter: 180mm

Height ground shell: 100mm, 300mm (standard) or 500mm

Weight: approx. 13.5kg (for permanent installation + 1.5kg)