



Colour: DB 703

Protector 220/720

Specifications

Completely cylindrical cast aluminium/galvanised steel bollard with a flat top.

Mounting

Removable with 3p-Technology, consisting of a ground shell, junction piece with integrated breaking point, two clamping bolts, a hex head bolt and a lock nut.


Alternative version available for embedding in concrete.

	Galvanised steel	Cast aluminium
Fixed root	BO PR2 R 320 XXX XX 07	BO PR2 R 020 XXX XX 07
3p-Technology	BO PR2 T 320 XXX XX 07	BO PR2 T 020 XXX XX 07

Product codes for powder coated DB 703

Finish

1. Powder coating in RAL 3020, 6005, 6009, 7016, 7035, 9005, 9006, 9016 and DB 703 as standard.
2. Accessories and special requirements such as different colours, red and white paint, reflective film or powder coating of chains, rings, shackles, etc. are available to special order.

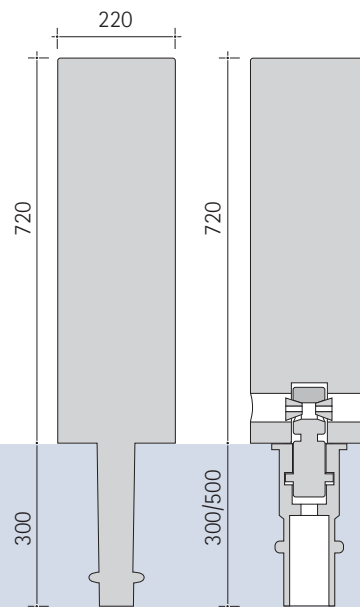

Measurements

Height above ground level: 720mm

Diameter: 220mm

Height ground shell: 100mm, 300mm (standard) or 500mm

Weight: approx. 22kg (for fixed mounting + 1.5kg)