
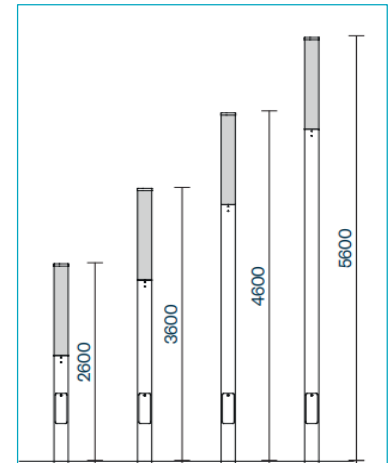


Product Name	Silka Max
Mounting Options	Root mounted / Flange plate
Output	up to 3,530lm
Light Source	LED
Colour Temp	2700K / 3000K / 4000K / RGBW 2700K / RGBW 4000K
CRI	90
Distribution	Symmetric
Power	up to 59W
Luminaire Efficacy (max)	60lm/W
Electrical Class	Class I / Class II
Operating Voltage	220-240V
Driver	24V DC constant voltage
Drive Current Range	n/a
Lifetime	50,000 hours (L70)
Operating Temperature	-20°C to +50°C
IP Rating	IP66
IK Rating	IK09
Colour Finish	White RAL 9016 / Black RAL 9005 / Aluminium RAL 9006 / Metallic Grey RAL 9007 / Metallic Dark Grey DB 703 / Corten Brown (other RAL colours on request)
Housing Material	Aluminium
Finish	Textured polyester powder coat
Glazing Material	Opal high impact-resistant PMMA
Weight (max.)	39.5 kg (Flange) / 45.7kg (Root)
Certifications	CE
Control Options	Switched / Bluetooth (Casambi) / DMX / Integral CMS

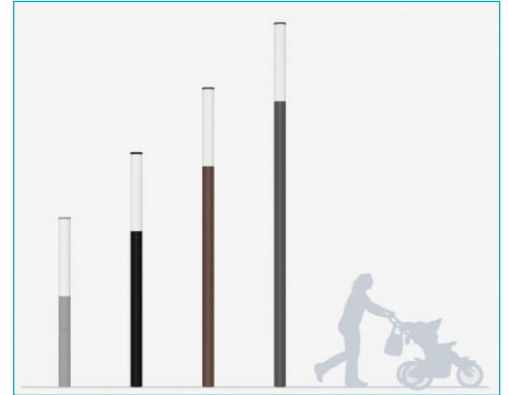

Additional Information

Luminaire glazing height: 1200mm
Diameter: Ø170mm

Please see our website for further details on weights and dimensions.