

INSTALLATION INSTRUCTIONS

IMPORTANT: DISCONNECT ELECTRICAL SUPPLY BEFORE CARRYING OUT MAINTENANCE

LARGE GREY WORNUM LUMINAIRE

This luminaire is supplied fully assembled and wired.

INSTALLATION

1) Unpack the luminaire and wire in the supply cable to the terminal block located at the base of the spigot as below:-

IMPORTANT WIRING CODE
L = LIVE, N = NEUTRAL, E= EARTH
THIS FITTING MUST BE EARTHED
THIS IS IMPORTANT

2) Connect the incoming supply cable to the terminal block following the wiring code above, ensure the cord grip is in position and firmly tightened.


Feed the cable down the column.

Fit the luminaire onto the column and ensure that the luminaire is vertical, adjust and tighten the set screws in the column.

3) Connect the cable to the electrical supply, refer to the wiring code above.

4) For access into the luminaire for maintenance, undo the two latches holding the lid in position and hinge up.

5) Once maintenance has been carried out, hinge down the lid and refit the latches. Ensure they snap home with a definite click.

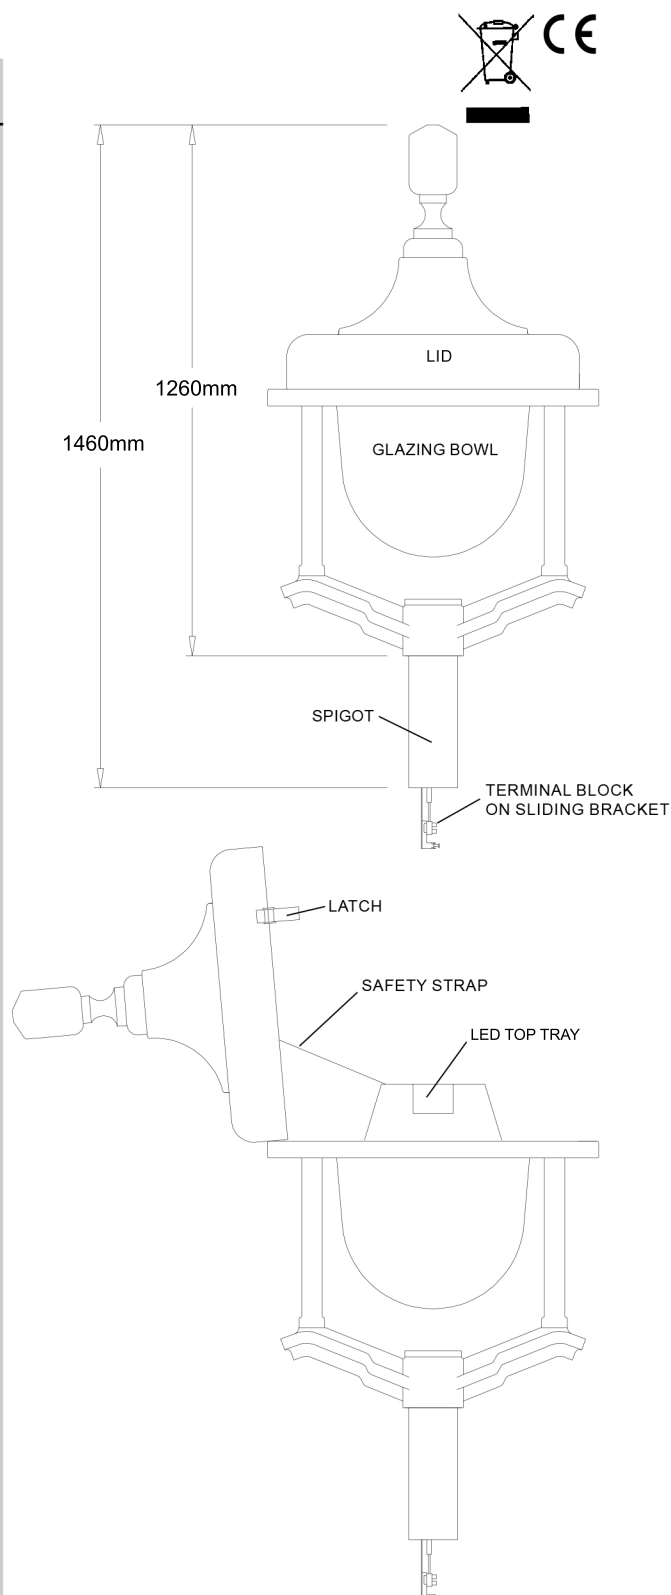

DIAMETER = Ø652mm WEIGHT = 24.3kg

DW Windsor Lighting

Pindar Road, Hoddesdon, Hertfordshire, EN11 0DX

Tel: 01992 474600

E-mail: info@dwwindsor.co.uk

www.dwwindsor.co.uk