

Installation Instructions

! IMPORTANT

- DISCONNECT ELECTRICAL SUPPLY BEFORE INSTALLATION OR SERVICING.
- THIS PRODUCT MUST BE EARTHED.
- THIS PRODUCT IS DESIGNED TO OPERATE OUTDOORS. IF REQUIRED TO BE USED INDOORS PLEASE CONSULT DW WINDSOR.

IP66 IK10   

230VAC 50Hz

Product Details

Dimensions (mm)		
A	B	C
500	500	532

Max. Weight (kg)*	Windage m ²
10.5	0.21

Power Ranges (Watts)
7-75

Column Engagement

Entry Options	Column Engagement
76mm Post Top Entry	70mm

Fasteners Supplied

- 4x M8 Grub Screws

Recommended Torque

Column Mounting Torque (Nm)
16

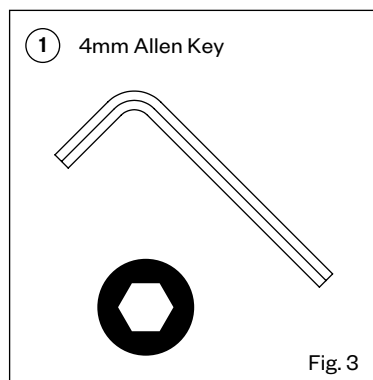


Fig. 3 - Tools required for the Sofia lantern installation. Not supplied

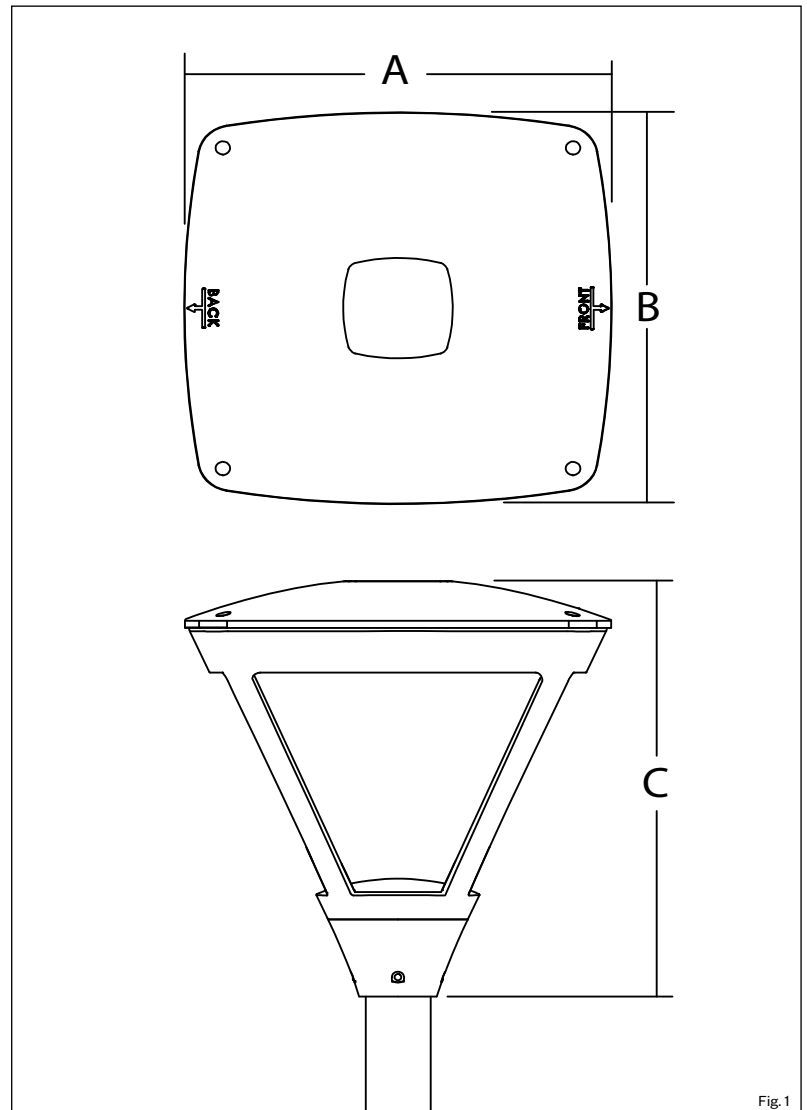


Fig. 1 - Sofia (Please see Sofia data sheet for all technical drawings).

NOTE!

To replace broken safety glass, please contact DW Windsor for replacement, quoting the product serial number.



NOTE!

- Blue Light Retinal Hazard Risk Group 1.
- Exposure Hazard Value (EHV) 1.61.
- Blue Light Hazard Group 0 At A Distance (HD) Of 1.9m From Product.
- Do Not Stare At The Light Source.
- Personnel To Wear Protective Safety Glasses Compliant With 'EN166 1F/EN169' When Commissioning/Maintaining This Product.



Due to continuous product development the details within this document are subject to change at any time, please contact us for the most up-to-date information or visit: www.dwwindsor.com

DW Windsor


Pindar Road, Hoddesdon, Hertfordshire, EN11 0DX
T: +44 (0) 1992 474600 | E: info@dwwindsor.com

dwwindsor.com

Sofia Installation Steps | Post Top


Step 1

Place lantern on top of post. Ensure cable is not trapped between lantern and post.

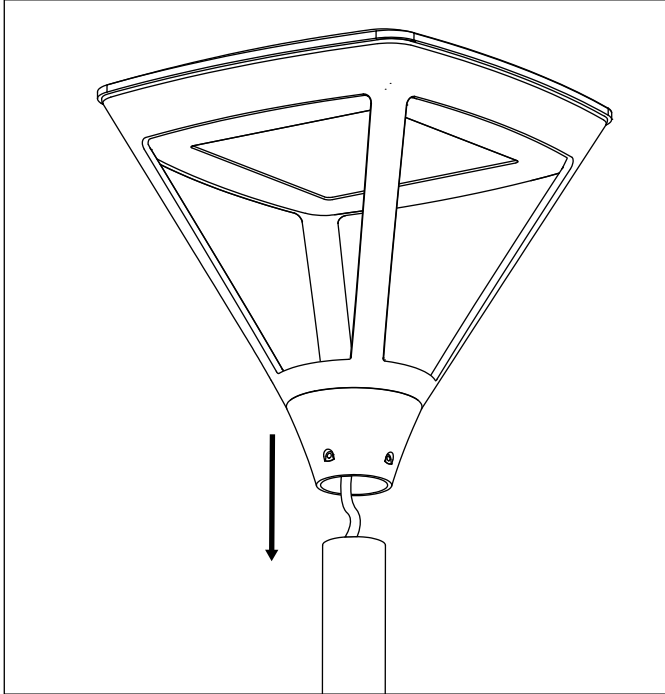


Step 2

Tighten all four grub screws and ensure that lantern is straight.

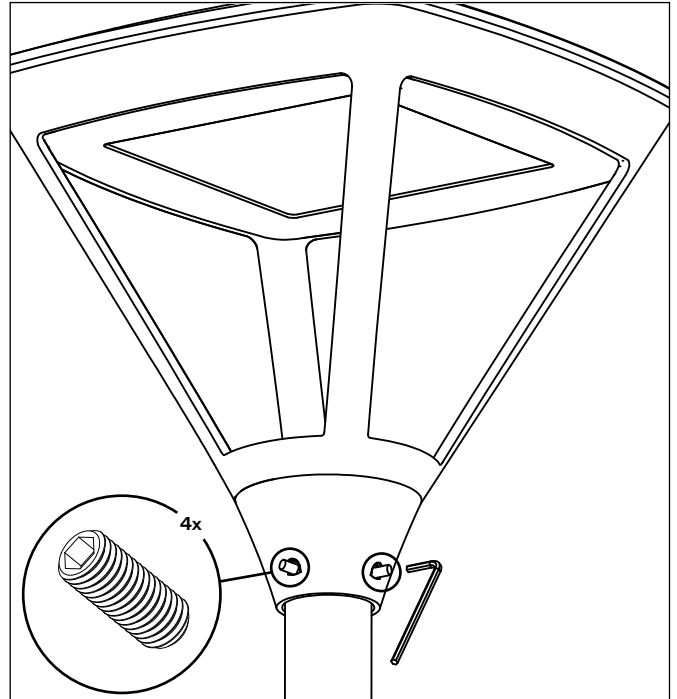

Step 3

Ensure lantern is facing correct direction using indication markers on top.

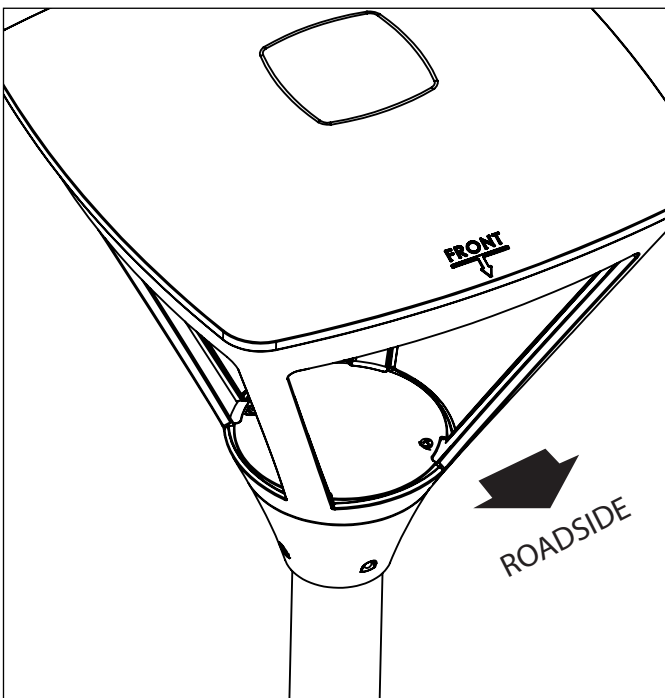

LEDs contained within this luminaire shall only be replaced by the manufacturer, their service agent or similar qualified person.



DW Windsor
Pindar Road, Hoddesdon, Hertfordshire, EN11 ODX
T: +44 (0) 1992 474600 | E: info@dw Windsor.com

dw Windsor.com