

Warwick

heritage

IP65 IK07
CLASS I

Options

Size:
Warwick
For mounting at 3 - 6 metres
Maximum lamp wattage: 150w

Glazing:
Medium clear polycarbonate
glazing cone
(Other glazing cone options on special request)

Optical control:
Diamond Optic® (standard)
Highbeam® refractor
Small skirt refractor

Lamp:
45, 60, 90, 140w CosmoWhite
50, 70, 100w SON-T+
70, 100, 150w HQI-E
35, 70, 150w CDM-T
70, 100w CDO-TT
42w PL-T

Mounting:
76 mm Ø

Colour:
RAL 9017 Black

Other:
Electronic gear, some models

Miniature photocell
Obtrusive light shield(s)
Coronet painted gold

Materials

Canopy:
Spun aluminium

Coronet:
Aluminium (painted)

Base:
Cast aluminium

Access:
Removable canopy

Seals:
Neoprene

Finish:
Polyester powder coated

- Ingress Protection – one piece glazing and neoprene gasket ensure whole lantern sealed to IP65
- Base casting has external connector block for ease of installation
- Tool-less access to luminaire for ease of maintenance

Diamond Optic®



Diamond Optic® reflector system reduces light pollution and allows increased column spacings. See pages 16-19 for full details.

When fitted with 100w SON-T+ or CDO-TT lamps, Diamond Optic® setting A is unavailable and Diamond Optic® setting C (31/35) is restricted to 25/25 due to the size of the lamp and lampholder, resulting in a slightly altered distribution pattern.

Warwick Product Codes


Warwick		Example
1. Model		
WAR		WAR
2. Lamp		
050S	50w SON-T+	060W
070S	70w SON-T+/CDO-TT	
100S	100w SON-T+/CDO-TT	
070H	70w HQI-E	
100H	100w HQI-E	
150H	150w HQI-E	
035C	35w CDM-T	
070C	70w CDM-T	
150C	150w CDM-T	
042P	42w PL-T	
045W	45w CosmoWhite	
060W	60w CosmoWhite	
090W	90w CosmoWhite	
140W	140w CosmoWhite	
3. Colour		
11	RAL 9017 Black*	11
4. Diamond Optic® Setting		
A	5/35	C
B	10/10	
C	31/35	
D	5/25	
5. Photocell		
C	Yes	C
N	No	

Open front cover flap for our guide to using this table. For non-standard codes, call us on 01992 474600.

Example Code:
1. WAR Warwick
2. 060W 60w CosmoWhite
3. 11 Painted RAL 9017 Black
4. C Diamond Optic® setting C
5. C with Photocell

= WAR 060W 11 C C



* For an alternative colour, replace 11 with the two digit number of the colour you require

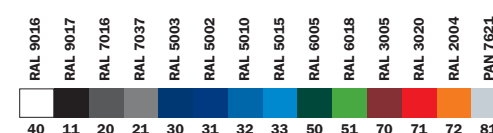

This product is available in the colours listed on the opposite page, as well as any other colour from our full standard range, shown here, to special order. See inside cover flap for details.

Suggested column/bracket options

For full range of columns and brackets see page 162

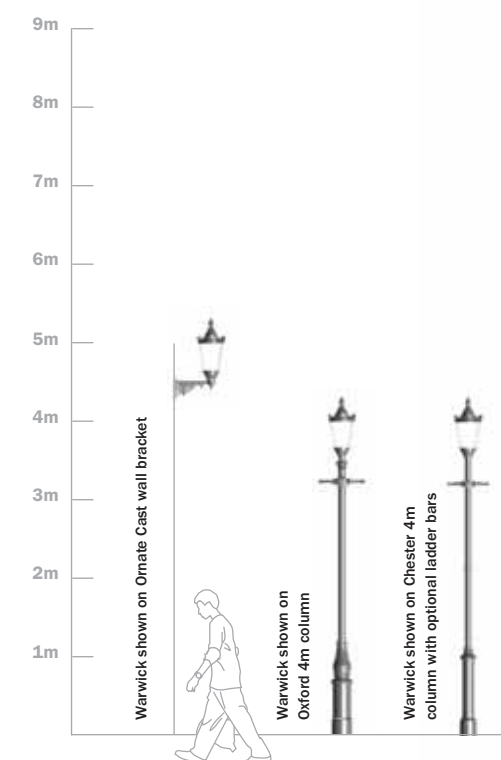

Dimensions (mm)			Weight (kg)	Windage
A	B	C		
778	345	76	9.4	0.15m ²

dwwindsor.co.uk
answers@dwwindsor.co.uk

